


FLOODED

FDC Series are Deep Cycle liquid electrolyte batteries specifically designed for small traction applications (requiring deep discharges). With robust design made of thick positive & negative grid plates in a special alloy, the FDC Series offer low self-discharge and ensure a long service life with high resistance to cycles. This range is ideal for golf cart applications, aerial work platform, cleaning machine, solar, ..

DIMENSIONS & WEIGHT

LENGTH	259±2mm
WIDTH	179±2mm
TOTAL HEIGHT	278±2mm
ELECTROLYTE	6.5L
GROSS WEIGHT	26.9kg

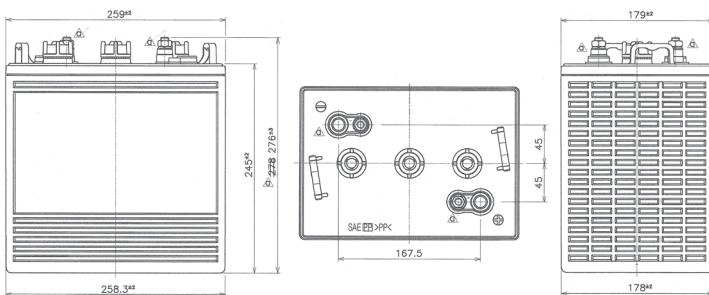

TERMINAL EHPT



Terminal Height (mm)	38
Torque Value in-lb (Nm)	95 - 105 (11 - 2)
Bolt	5/16"

SPECIFICATION

VOLTAGE

6v

CAPACITY (100h)

232Ah

CAPACITY (20h)

210Ah

CAPACITY (10h)

193Ah

CAPACITY (5h)

175Ah

CAPACITY (25A)

383min

CAPACITY (75A)

105min

Operating temperature

-20°C to +45°C

At temperatures below 0°C maintain a state of charge higher than 60%.

Capacity affect by temp.

40°C/104°F 105%

30°C/86°F 100%

0°C/0°F 80%

CHARGE METHOD

Phase 1 (Constant current)

Constant current charge at 20.5~26.6 amperes until the battery voltage measures between 7.14~7.29 V/Battery (25°C) on charge voltage.

Phase 2 (Constant voltage)

Constant voltage charge at 7.14~7.29 V/Battery (25°C) until the current measures between 2.05~6.15 amperes.

Phase 3 (Constant current)

Constant current charge at 2.05~6.15 amperes until the battery voltage measures between 7.5~8.1V/battery (25°C) or until dV/dt reaches to less than 0.035.

Do not install or charge batteries in a sealed or non-ventilated compartment. Constant under or overcharging will damage the battery and shorten its life as with any battery.

APPLICATIONS



Aerial Work Platform



Golf Cart





Floor Cleaning Machine




Solar


SELF DISCHARGE DATA

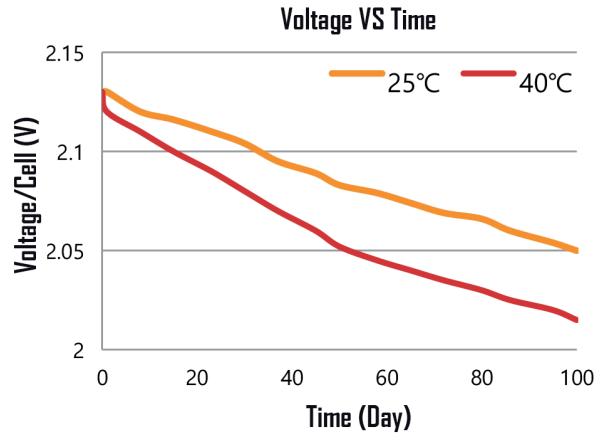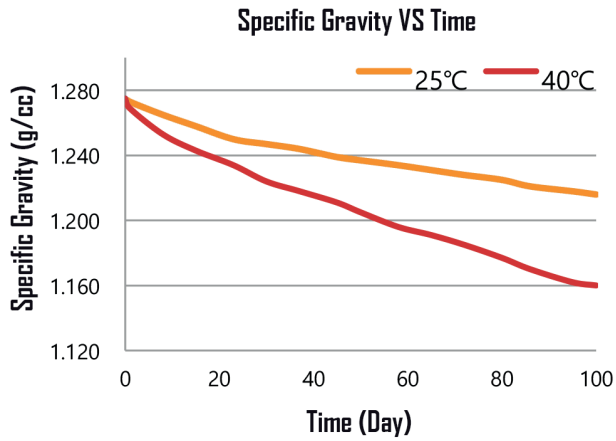

CAPACITY BY DISCHARGE CURRENT

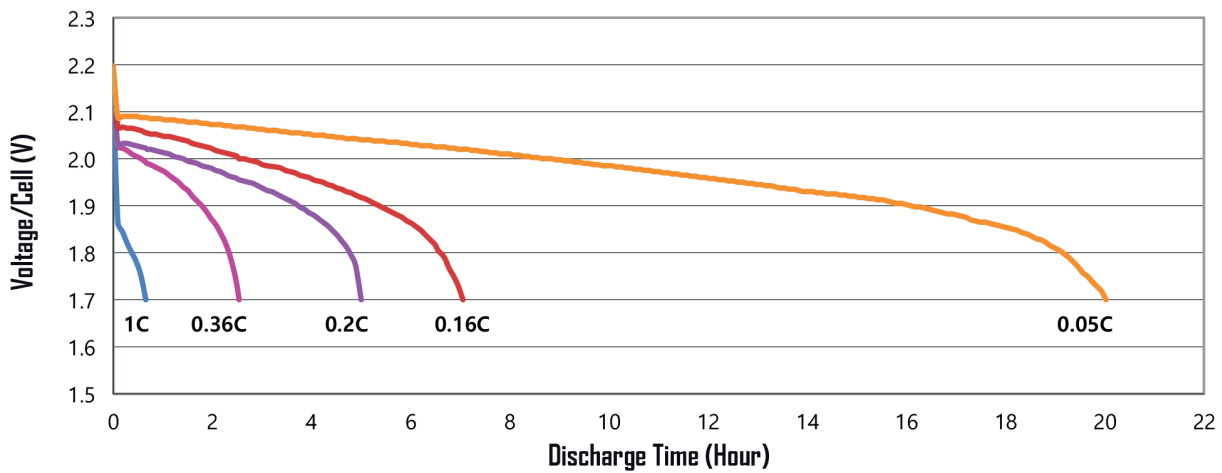

CYCLE SERVICE LIFE: BCIS-06 (DOD 100% 27°C)

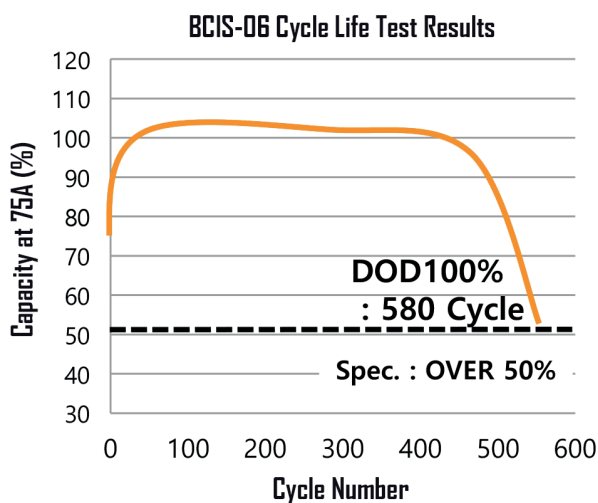

DEPTH OF DISCHARGE (DOD) & CYCLE NUMBER

