

FULBAT[®]

STARTER BATTERY

POWERSPORT BATTERY RANGE

CATALOG 2025

LITHIUM | GEL | MF | DRY | CHARGERS



ABOUT US




French based company, Fulbat is a leading force in the battery business, present in both replacement and OEM markets. Founded in 2005, we are constantly developing, manufacturing, marketing and selling lead-acid batteries, as well as lithium batteries and battery chargers.

With our technical knowledges and experience, we are able to design new innovative battery solutions to meet the current customers' expectations. We offer an exhaustive program of **Starter batteries**, **Industrial batteries** and **Motive Power batteries**, covering a full range of application. Our Starter Battery range is designed to cover all powersport applications and Lawn & Garden applications.

Fulbat batteries and chargers are widely distributed on all continents through a strong distributor's network, and are very well recognized as qualitative, performing and reliable products.

Manufactured according to the most innovative production processes, Fulbat products are certified by ISO 9001, ISO 14001 and TS 16949.

WORLDWIDE PRESENCE

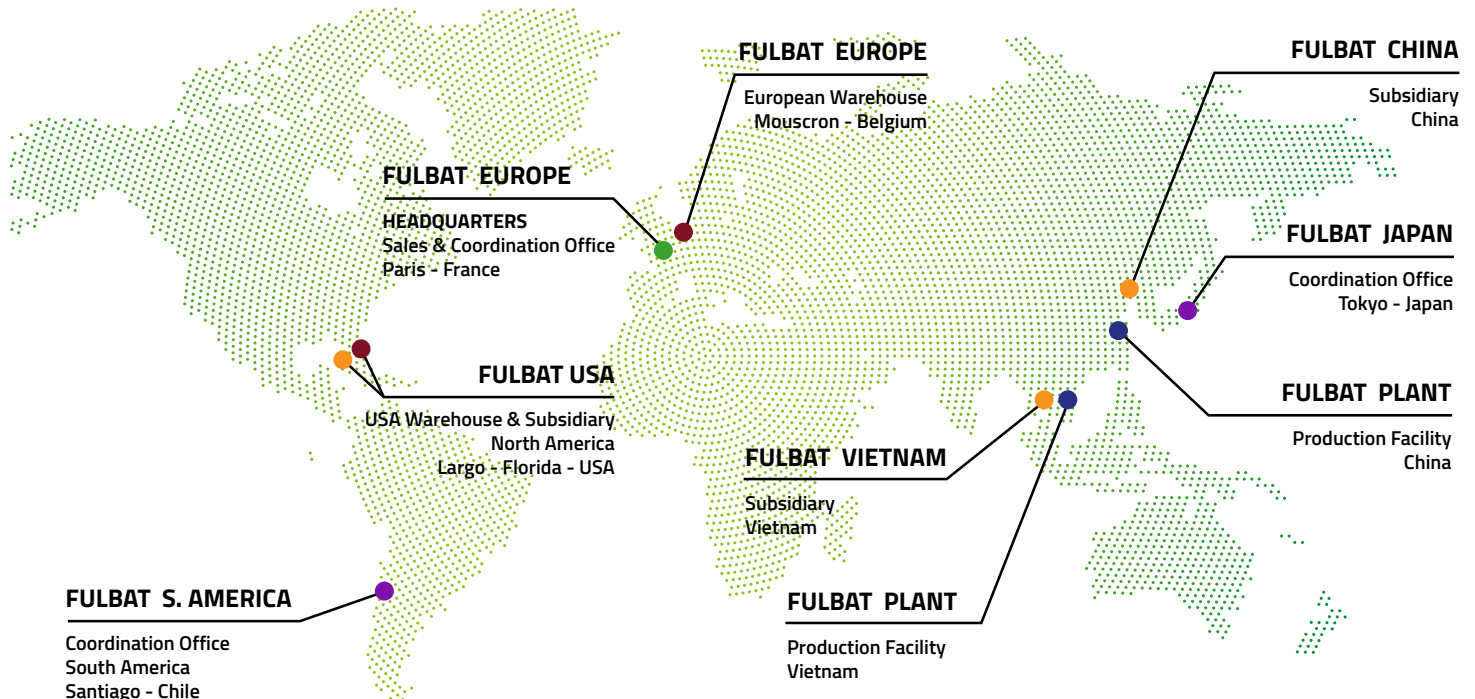

INTRODUCTION



No matter what type of vehicle you have or how you use it, our wide range of starter batteries has been developed to satisfy all current market requirements.

Composed of a comprehensive line of batteries, Fulbat Starter Battery offers different technologies:


LITHIUM (LiFePO₄), GEL, MF and DRY.

Fulbat batteries will provide multiple and varied benefits: high starting performance, light weight, ready to use, maintenance free, vibration resistance and many others, whether for leisure or competition.

From 1st February 2021, a new EU regulation for the sale of acid for batteries came into force. On that date, the sale of electrolyte for batteries (sulfuric acid), has been prohibited to end users (non-professionals), and only professionals are now entitled to acquire batteries with an electrolyte pack. As a battery specialist, Fulbat maintains all its product ranges and offers the widest ready to use battery range.

APPLICATIONS

Fulbat Starter Battery covers the wide majority of powersport applications.

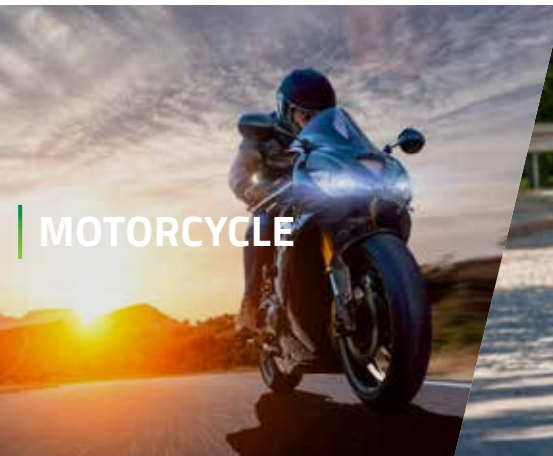

MOTORCYCLE



SCOOTER




ATV



SSV/UTV



WATERCRAFT

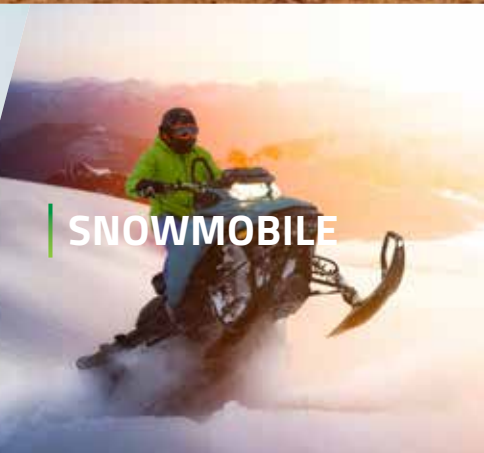

SNOWMOBILE

MAIN FEATURES

From Dry to Lithium technology and from daily use to leisure, Fulbat batteries provide different performances and features.




		LITHIUM	GEL	MF	DRY
PERFORMANCE	Cold Cranking Amp	●●●●●	●●●●●	●●●●●	●●●●●
	Cycle Life	●●●●●	●●●●●	●●●●●	●●●●●
	Vibration resistance	●●●●●	●●●●●	●●●●●	●●●●●
	Weight	●●●●●	●●●●●	●●●●●	●●●●●
	Shelf Life in storage	●●●●●	●●●●●	●●●●●	●●●●●
FEATURES	Ready to use	✓	✓	-	-
	Maintenance Free	✓	✓	✓	-
	No acid handling	✓	✓	-	-
	Easy to ship	✓*	✓	-	-
	Compatible e-commerce <i>(compliant with 2021 European (EU) 2019/1148 Regulation for the sale of acid for batteries)</i>	✓	✓	-	-
Multipositional fitment					

*According to ADR, IMDG & IATA regulations

BATTERY FINDER

Find the right battery for your vehicle on fulbat.com

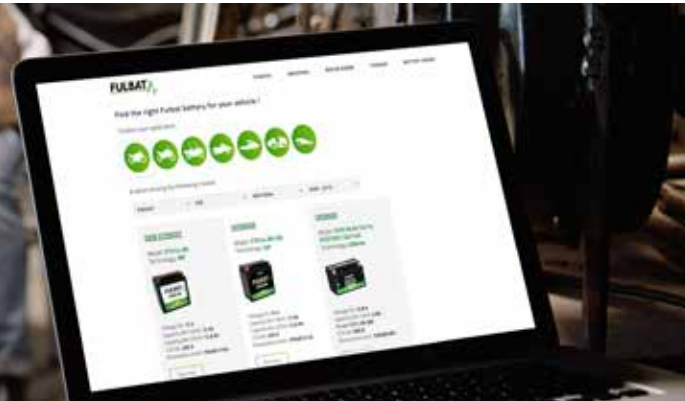

LITHIUM (LiFePO4) RANGE

High performance & light weight

The Lithium range is designed to offer the ultimate riding experience. Ready to use and with ultra-light weight conception, this LiFePO4 range will ensure extreme starting performance, very low self-discharge and extreme cycle life. Thanks to the Battery Management System integrated, these batteries offer a very safe solution, ideal for the most demanding riders.


FEATURES

- Ready to use
- 100% maintenance Free
- Ultra-lightweight compare to lead acid battery
- Very high cold cranking performance
- Easy to install with the foam spacers
- Ultra-safe thanks to the integrated BMS
- Very fast recharge
- Multi-positional fitment
- Integrated LCD battery tester
- Very low self-discharge



COMPATIBLE CHARGERS

- Fulload 1000 - battery capacity up to 20Ah
- Fulload F4 - battery capacity up to 80Ah
- Fulbank 2000 - battery capacity up to 40Ah



Designation	P/N	Power (Wh)	Capacity Ah (10Hr)	CCA (A)	Dimensions (±2mm)			Polarity	Charging current (A)		Equivalent lead-acid battery types (most popular models)
					L	W	H		Std	Max	
FLTK01*	560501	25.6	2	140	86	48	90	⊖ ⊕	1	2	KTM OE replacement
NEW FLTX4L/5L/7L FLTZ5S/6S/7S**	560635	25.6	2	120	107	56	85	⊖ ⊕	1	2	FB4L-B; FTX4L-B/FTZ5S; FTX5L-B/FTZ6S; FTX7L-B/FTZ7S; FTZ7V; FTZ8V
NEW FLTX4L/5L/7L+ FLTZ5S/6S/7S+	560636	38.4	3	180	107	56	85	⊖ ⊕	1.5	3	FB4L-B; FTX4L-B/FTZ5S; FTX5L-B/FTZ6S; FTX7L-B/FTZ7S; FTZ7V; FTZ8V
FLT7B/9B	560624	51,2	4	240	150	65	93	⊕ ⊖	2	4	FT7B-4; FT7B-BS; FT9B-4; FT9B-BS
NEW FLTX7A/9 FLTZ10S	560633	38.4	3	180	150	87	93	⊕ ⊖	1.5	3	FTX7A-BS; FTX9-BS; FTZ10S
FLTX7A/9/12/14 FLTZ10S/12S/14S	560625	64	5	300	150	87	93	⊕ ⊖	2.5	5	FTX7A-BS; FTX9-BS; FT12A-BS; FTX12-BS; FTX14-BS; FTZ10S; FTZ12S; FTZ14S
NEW FLTX12/14 FLTZ12S/14S	560634	102.4	8	480	150	87	93	⊕ ⊖	4	8	FTX7A-BS; FTX9-BS; FT12A-BS; FTX12-BS; FTX14-BS; FTZ12S; FTZ14S
FLT12B/14B	560626	76.8	6	360	150	69	130	⊕ ⊖	3	6	FT12B-4; FT12B-BS; FT14B-4; FT14B-BS
FLTX20H	560628	153.6	12	720	175	87	155	⊕ ⊖	6	12	FTX20-BS
FLTX20HL	560627	153.6	12	720	175	87	155	⊖ ⊕	6	12	FB16CL-B; FTX20L-BS; FTX20HL-BS; FHD20HL-BS
FLTX30HL	560629	230,4	18	900	168	127	177	⊖ ⊕	6	18	53030; FB30L-B; FB30CL-B; F60-N30L-A; FIX30L-BS; FHD30L-BS

*This model does not have an integrated BMS / **This model does not include an LCD battery tester

GEL RANGE

Ready to use & maintenance free

The Gel battery range is designed to offer maximum performance and safety! Ready to use, the GEL battery will not require any acid handling, initial preparation or maintenance. Non-spillable design (VRLA) linked to its high performance make it the ideal battery for all powersports.

FEATURES


- Ready to use - Factory activated
- 100% maintenance free
- Easy to install
- Non-spillable: easy to ship
- Multi-positional fitment
- Suitable for cold weather
- No acid handling
- Increased life time



COMPATIBLE CHARGERS

- Fulload 1000 - battery capacity up to 20Ah
- Fulload F4 - battery capacity up to 80Ah
- Fulbank 2000 - battery capacity up to 40Ah

NON-SPILLABLE



Designation	P/N	Voltage (V)	Capacity Ah (10h)	Capacity Ah (20h)	CCA (A)	Dimensions (±2mm)			Polarity	Terminal 3D
						L	W	H		
6N4-2A/A-4	550959	6	4	4.2	25	71	71	93	⊖ ⊞	-
6N6-3B/B-1	550960	6	6	6.3	50	95	55	117	⊖ ⊞	⬇
B49-6	550961	6	10	10.5	80	91	83	159	⊞ ⊖	⬇
B38-6A	550962	6	13	13.7	105	119	83	161	⊖ ⊞	⬇
6N11A-1B/3A	550957	6	11	11.6	90	121	58	130	⊖ ⊞	⬇
6N11A-4A	550958	6	11	11.6	90	121	58	130	⊞ ⊖	⬇
12N5.5-3B	550980	12	5.5	5.8	70	135	60	130	⊞ ⊞ ⊞ ⊞	⬇
12N5.5-4A/4B	550981	12	5.5	5.8	70	135	60	130	⊞ ⊞ ⊞ ⊞	⬇
FB3L-A/B	550842	12	3	3.2	35	98	56	110	⊞ ⊞ ⊞ ⊞	⬇
FB4L-B	550916	12	5	5.3	50	120	70	92	⊞ ⊞ ⊞ ⊞	⬇
FB5L-B	550991	12	5	5.3	65	120	60	130	⊞ ⊞ ⊞ ⊞	⬇
FB7-A	550992	12	8	8.4	120	135	75	133	⊞ ⊞ ⊞ ⊞	⬇
FB7C-A	550989	12	8	8.4	85	129	89	114	⊞ ⊞ ⊞ ⊞	⬇
FB7L-B/B2	550995	12	8	8.4	100	136	76	130	⊞ ⊞ ⊞ ⊞	⬇
FB9-B (12N9-4B-1)	550925	12	9	9.5	115	135	75	139	⊞ ⊞ ⊞ ⊞	⬇
FB10L-A2/B2	550956	12	11	11.6	120	133	90	145	⊞ ⊞ ⊞ ⊞	⬇
FB12A-A/B (12N12A-4A-1)	550947	12	12	12.6	155	134	80	161	⊞ ⊞ ⊞ ⊞	⬇
FB12AL-A2	550926	12	12	12.6	150	134	80	161	⊞ ⊞ ⊞ ⊞	⬇
FB14A-A2	550971	12	14	14.7	200	134	88	176	⊞ ⊞ ⊞ ⊞	⬇
FB16AL-A2	550948	12	16	16.8	210	205	70	162	⊞ ⊞ ⊞ ⊞	⬇

Designation	P/N	Voltage (V)	Capacity Ah (10h)	Capacity Ah (20h)	CCA (A)	Dimensions (±2mm)			Polarity	Terminal 3D
						L	W	H		
FB16CL-B	550979	12	19	20	240	175	100	175		
FT4B-BS	550949	12	2.3	2.4	40	113	38	85		
FTR4A-BS	550950	12	2.3	2.4	45	113	48	85		
FTX4L-BS/FTZ5S	550671	12	5	5.3	70	113	70	85		
FTX5L-BS/FTZ6S	550919	12	5	5.3	90	113	70	105		
FTX6.5L-BS	550963	12	6.5	6.8	85	147	73	112		
FTX7L-BS	550920	12	6	6.3	100	113	70	130		
FTX7A-BS	550915	12	6	6.3	90	150	87	93		
FTX9-BS	550921	12	8	8.4	135	150	87	105		
FT12A-BS	550679	12	10	10.5	175	150	88	105		
FTX12-BS	550922	12	10	10.5	180	150	87	130		
FTX14-BS	550923	12	12	12.6	200	150	87	145		
FTX14L-BS	550990	12	12	12.6	200	150	87	145		
FTX14AH-BS/FB14-A2/B2 (12N14-4A)	550946	12	14	14.7	210	135	90	167		
FTX14AHL-BS/FB14L-A2/B2 (12N14-3A)	550927	12	14	14.7	210	135	90	167		
FTX16	550763	12	14	14.7	230	150	87	161		
FTX20-BS	550993	12	18	18.9	310	175	87	155		
FTX20A-BS	550994	12	18	18.9	270	150	87	161		
FTX20HL-BS	550924	12	18	18.9	310	175	87	155		
FTX24HL-BS/F50-N18L-A/A2/A3 (12N18-3A)	550982	12	21	22.1	350	205	87	162		
FIX30L-BS	550943	12	30	31.6	400	165	125	175		
FTZ7S	550635	12	6	6.3	130	113	70	105		
FT7B-4	550641	12	6.5	6.8	110	150	65	93		
FTZ7V	550998	12	6.5	6.8	105	113	70	121		
FTZ8V	550918	12	7	7.4	120	113	70	130		
FT9B-4	550642	12	8	8.4	120	150	68	105		
FTZ10S	550636	12	8.6	9.1	190	150	88	93		
FTZ12S	550637	12	11	11.6	210	150	88	110		
FT12-10Z	550999	12	10	10.5	180	194	59	112		
FT12B-4	550643	12	10	10.5	210	150	69	130		
FTZ14S	550638	12	11.2	11.8	230	150	88	110		
FT14B-4	550644	12	12	12.6	210	150	69	145		
53030 (F60-N30L-A)	550945	12	30	31.6	325	184	124	170		
53034 (F60-N30-A)	550843	12	30	31.6	325	184	124	170		



GEL FitHD RANGE

High capacity reinforced battery

The Gel FitHD range are high capacity batteries designed for Heavy Duty applications. With specific terminals and reinforced battery case, these batteries offer a maximum vibration resistance and higher starting power.

FEATURES

- ✔ Ready to use - Factory activated
- ✔ 100% maintenance free
- ✔ Easy to install
- ✔ Specific HD terminals*
- ✔ Reinforced battery case
- ✔ Non-spillable: easy to ship
- ✔ Multi-positional fitment
- ✔ Suitable for cold weather
- ✔ No acid handling
- ✔ Increased life time

**Only for FHD battery models*



COMPATIBLE CHARGERS

- ✔ Fulload 1000 - battery capacity up to 20Ah
- ✔ Fulload F4 - battery capacity up to 80Ah
- ✔ Fulbank 2000 - battery capacity up to 40Ah



Designation	P/N	Voltage (V)	Capacity Ah (10h)	Capacity Ah (20h)	CCA (A)	Dimensions (±2mm)			Polarity	Terminal 3D
						L	W	H		
NH12-20 (BMW)	550917	12	20	21.1	250	186	82	171	⊖ ⊖ ⊖ ⊖ ⊕	
FHD14HL-BS	550880	12	14	14.7	220	150	87	145	⊖ ⊖ ⊖ ⊖ ⊕	
FHD20HL-BS	550881	12	20	21.1	310	175	87	155	⊖ ⊖ ⊖ ⊖ ⊕	
FHD30HL-BS	550882	12	30	31.6	430	165	130	175	⊖ ⊖ ⊖ ⊖ ⊕	

Feel the Power!



AUXILIARY RANGE

High cycling capability

The Auxiliary battery range is specifically designed for Start-Stop automotive application. With non-spillable design and maintenance free, these AGM batteries provide enhanced cycling capability and the power required to run vehicle's on board electrics and computer management system.


FEATURES

- ⚡ AGM technology
- ⚡ Ready to use - Factory activated
- ⚡ 100% maintenance free
- ⚡ Easy to install
- ⚡ Non-spillable
- ⚡ Maximum safety
- ⚡ Increased lifetime: cycle resistance x3
- ⚡ Low self-discharge



COMPATIBLE CHARGERS

- ⚡ Fulload 1000 - battery capacity up to 20Ah
- ⚡ Fulload F4 - battery capacity up to 80Ah
- ⚡ Fulbank 2000 - battery capacity up to 40Ah



Designation	P/N	Voltage (V)	Capacity Ah (10h)	Capacity Ah (20h)	CCA (A)	Dimensions (±2mm)			Polarity	Terminal 3D
						L	W	H		
AUX9	550983	12	8	8.4	135	150	87	105	+	
AUX12	550984	12	10	10.5	180	150	87	130	+	
AUX14	550985	12	12	12.6	200	150	87	145	+	
AUX14J	550986	12	12	12.6	200	150	130	145	+	



Feel the Power!

MF RANGE

Maintenance free & easy to store

The MF battery range is designed to offer more comfort and performance. Maintenance free, the MF battery is delivered with a separate acid pack and needs to be filled and activated before the first use. Its AGM (Absorbed Glass Mat) design allows it to become sealed once activated and also improves the lifespan and resistance of the battery to harsh conditions.


FEATURES

- ↗ AGM technology
- ↗ Delivered with acid pack
- ↗ Need to be filled before first use
- ↗ No maintenance once activated
- ↗ Upright installation only
- ↗ Reduction of plate sulfation
- ↗ Suitable for cold weather
- ↗ Unlimited shelf life



COMPATIBLE CHARGERS

- ↗ Fulload 1000 - battery capacity up to 20Ah
- ↗ Fulload F4 - battery capacity up to 80Ah
- ↗ Fulbank 2000 - battery capacity up to 40Ah



Designation	P/N	Voltage (V)	Capacity Ah (10h)	Capacity Ah (20h)	CCA (A)	Dimensions (±2mm)			Polarity	Terminal 3D
						L	W	H		
FT4B-BS	550625	12	2.3	2.4	40	113	38	85		
FTR4A-BS	550624	12	2.3	2.4	45	113	48	85		
FTX4L-BS/FTZ5S-BS	550617	12	4	4.2	50	113	70	85		
FTX5L-BS	550618	12	4	4.2	80	113	70	105		
FTX7L-BS	550620	12	6	6.3	100	113	70	130		
FTX7A-BS	550619	12	6	6.3	105	150	87	93		
FT9A-BS	550748	12	9	9.5	115	135	75	139		
FTX9-BS	550621	12	8	8.4	135	150	87	105		
FT12A-BS	550602	12	10	10.5	175	150	88	105		
FTX12-BS	550603	12	10	10.5	180	150	87	130		
FTX14-BS	550604	12	12	12.6	200	150	87	145		
FTX14L-BS	550605	12	12	12.6	200	150	87	145		
FTX14AHL-BS	550607	12	12	12.6	210	135	90	167		
FTX14AH-BS	550606	12	12	12.6	210	135	90	167		
FTX16-BS	550609	12	14	14.7	230	150	87	161		
FTX20-BS	550611	12	18	18.9	270	175	87	155		
FTX20A-BS	550808	12	18	18.9	270	150	87	161		
FTX20L-BS	550610	12	18	18.9	270	175	87	155		
FTX24HL-BS	550630	12	21	22.1	350	205	87	162		
FIX30L-BS	550631	12	30	31.6	400	165	125	175		



Feel the Power!

DRY RANGE

Easy to store



The Dry battery range offers an incomparable choice of 6V and 12V models. Delivered with an acid pack, the DRY battery must be activated before the first use and must be checked periodically. DRY construction, no maintenance is necessary during a long period of storage.


FEATURES

- ✔ DRY charged construction
- ✔ Activation before first use
- ✔ Periodically maintenance & refilled if necessary
- ✔ Upright installation only
- ✔ 6V & 12V batteries
- ✔ Regular life duration
- ✔ Unlimited shelf life



COMPATIBLE CHARGERS

- ✔ Fulload 1000 - battery capacity up to 20Ah
- ✔ Fulload F4 - battery capacity up to 80Ah
- ✔ Fulbank 2000 - battery capacity up to 40Ah



Designation	P/N	Voltage (V)	Capacity Ah (10h)	Capacity Ah (20h)	CCA (A)	Dimensions (±2mm)			Polarity	Terminal 3D
						L	W	H		
6N4-2A	550891	6	4	4.2	25	71	71	96		-
6N4-2A-4	550510	6	4	4.2	25	71	71	96		-
6N4B-2A	550514	6	4	4.2	35	102	48	96		-
6N6-3B	550518	6	6	6.3	50	99	57	111		
6N6-3B-1	550519	6	6	6.3	50	99	57	111		
6N11A-1B	550501	6	11	11.6	90	122	62	131		
6N11A-3A	550894	6	11	11.6	90	122	62	131		
B49-6	550893	6	8	8.4	80	91	83	160		
B38-6A	550896	6	13	13.7	105	119	83	161		
12N5.5-3B	550529	12	5.5	5.8	55	135	60	130		
12N5.5-4A	550530	12	5.5	5.8	55	135	60	130		
FB3L-A	550589	12	3	3.2	32	98	56	110		
FB3L-B	550588	12	3	3.2	32	98	56	110		

Designation	P/N	Voltage (V)	Capacity Ah (10h)	Capacity Ah (20h)	CCA (A)	Dimensions (±2mm)			Polarity	Terminal 3D
						L	W	H		
FB4L-B	550590	12	4	4.2	56	120	70	92	+	+
FB5L-B (12N5-3B)	550591	12	5	5.3	65	120	60	130	+	+
FB7L-B2 (12N7-3B)	550595	12	8	8.4	85	135	75	133	+	+
FB7-A (12N7-4A)	550592	12	8	8.4	105	135	75	133	-	+
FB7C-A	550593	12	8	8.4	85	130	90	114	+	+
FB9-B (12N9-4B-1)	550596	12	9	9.5	115	135	75	139	+	+
FB9L-B (12N9-3B)	550599	12	9	9.5	115	135	75	139	+	+
FB10L-A2	550556	12	11	11.6	130	135	90	145	-	+
FB10L-B2	550557	12	11	11.6	130	135	90	145	+	+
FB10L-BP (FB10L-B)	550558	12	11	11.6	165	135	90	145	+	+
FB12A-A (12N12A-4A-1)	550561	12	12	12.6	155	134	80	160	-	+
FB12AL-A/A2	550564	12	12	12.6	155	134	80	160	-	+
FB12A-B	550562	12	12	12.6	155	134	80	160	+	+
FB12C-A	550566	12	12	12.6	155	134	80	175	-	+
FB14-A2 (12N14-4A)	550567	12	14	14.7	175	134	89	166	-	+
FB14L-A2 (12N14-3A)	550569	12	14	14.7	175	134	89	166	-	+
FB14L-B2	550570	12	14	14.7	175	134	89	166	+	+
FB14A-A2	550571	12	14	14.7	175	134	89	176	-	+
FB16B-A1	550897	12	16	16.8	210	160	90	161	-	+
FB16AL-A2	550576	12	16	16.8	210	207	71	164	-	+
FB16CL-B	550579	12	19	20.0	240	175	100	175	+	+
FB30L-B	550552	12	30	31.6	300	165	130	176	+	+
FB30CL-B	550553	12	30	31.6	300	165	130	192	+	+
F50-N18L-A / 12N18-3A	550547	12	20	21.1	260	205	90	162	-	+
F50-N18L-A3	550899	12	20	21.1	260	205	90	162	-	+
51814	550545	12	-	19	210	186	82	171	+	+
51913	550542	12	-	19	210	186	82	171	-	+
53030 (F60-N30L-A)	550544	12	-	30	300	186	130	171	+	+
53034 (F60-N30-A)	550546	12	-	30	300	186	130	171	-	+



UPGRADE CROSS REFERENCE CHART

DRY	MF	GEL	LITHIUM
6N4-2A - 6N4-2A-4		6N4-2A/A-4	
6N6-3B - 6N6-3B-1		6N6-3B/B-1	
B49-6		B49-6	
B38-6A		B38-6A	
6N11A-1B - 6N11A-3A		6N11A-1B/3A	
12N5.5-3B		12N5.5-3B	
12N5.5-4A		12N5.5-4A/4B	
FB3L-A - FB3L-B		FB3L-A/B	
FB4L-B		FB4L-B	FLTX4L/5L/7L - FLTZ5S/6S/7S
FB5L-B - 12N5-3B		FB5L-B GEL	
12N7-4A - FB7-A		FB7-A	
FB7C-A		FB7C-A	
FB7L-B - FB7L-B2 - 12N7-3B		FB7L-B/B2	FLTX4L/5L/7L - FLTZ5S/6S/7S
FB9-B - 12N9-4B1	FT9A-BS	FB9-B	
FB10L-A2 - FB10L-B2 - 12N10-3A/B		FB10L-A2/B2	
FB12AL-A/A2		FB12AL-A2	
FB12A-A - FB12A-B - 12N12A-4A-1		FB12A-A/B	
FB14A-A1 - FB14A-A2		FB14A-A2	
FB16AL-A2		FB16AL-A2	
FB16CL-B		FB16CL-B	FLTX20HL
	FT4B-BS	FT4B-BS	
	FTR4A-BS	FTR4A-BS	
	FTX4L-BS/FTZ5S	FTX4L-BS/FTZ5S	FLTX4L/5L/7L - FLTZ5S/6S/7S
	FTX5L-BS	FTX5L-BS/FTZ6S	FLTX4L/5L/7L - FLTZ5S/6S/7S
	FTX7A-BS	FTX7A-BS	FLTX7A/9 - FLTZ10S
	FTX7L-BS	FTX7L-BS	FLTX4L/5L/7L - FLTZ5S/6S/7S
	FTX9-BS	FTX9-BS	FLTX7A/9 - FLTZ10S
	FT12A-BS	FT12A-BS	FLTX12/14 - FLTZ12S/14S
	FTX12-BS	FTX12-BS	FLTX12/14 - FLTZ12S/14S
	FTX14-BS	FTX14-BS	FLTX12/14 - FLTZ12S/14S
	FTX14L-BS	FTX14L-BS GEL - FHD14HL-BS	
FB14-A2 - FB14-B2 - 12N14-4A	FTX14AH-BS	FTX14AH-BS / FB14-A2	
FB14L-A2 - FB14L-B2 - 12N14-3A	FTX14AHL-BS	FTX14AHL-BS / FB14L-A2	
	FTX16-BS	FTX16	
FB16-B	FTX20-BS	FTX20-BS	FLTX20H
	FTX20A-BS	FTX20A-BS	
FB16L-B - FB18L-A	FTX20L-BS	FTX20HL-BS GEL - FHD20HL-BS	FLTX20HL
12N18-3A - F50-N18L-A - F50-N18L-A3	FTX24HL-BS	FTX24HL-BS / F50-N18L-A/A2/A3	
FB30L-B	FIX30L-BS	FIX30L-BS GEL - FHD30HL-BS	FLTX30HL
		FTZ7V	FLTX4L/5L/7L - FLTZ5S/6S/7S
		FTZ7S GEL - FTZ8V	FLTX4L/5L/7L - FLTZ5S/6S/7S
		FT7B-4	FLT7B/9B
		FT9B-4	FLT7B/9B
		FTZ10S	FLTX7A/9 - FLTZ10S
		FTZ12S	FLTX12/14 - FLTZ12S/14S
		FT12B-4	FLT12B/14B
		FTZ14S	FLTX12/14 - FLTZ12S/14S
		FT14B-4	FLT12B/14B
51814 - 51913		NH12-20	
F60-N30L-A - 53030		53030	FLTX30HL
F60-N30-A - 53034		53034	


LITHIUM

Ready to use
High CCA performance
Ultra lightweight




GEL

Ready to use
100% maintenance free
Non-spillable

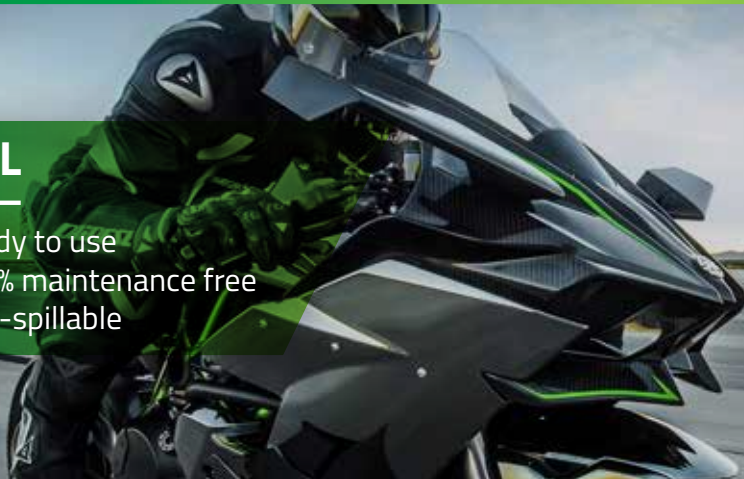

MF

Must be filled before use
No maintenance after activation
Unlimited shelf life

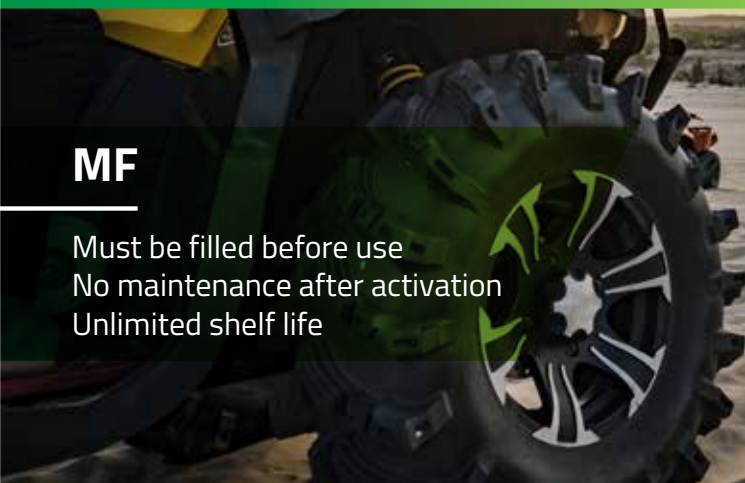

DRY

Activation before first use
Periodic maintenance required
Unlimited shelf life



CHARGERS

Whether it is to charge or maintain lead-acid or lithium batteries (LiFePO₄), Fulbat chargers will be able to answer all your needs, from the smallest battery to the largest capacity. Designed with different charging stages, our automatic smart chargers will guarantee optimum charging efficiency and safety.

FULLLOAD 1000 (P/N: 750514)

Battery compatibility: Lead-acid & Lithium (LiFePO₄)

Voltage: 6V/12V

Charging rate: 1A

Battery capacity: Up to 20Ah (maintains all sizes)

Stages: 3

- Charges and maintains 6V/12V lead-acid batteries (GEL, AGM, MF, DRY, Ca/Ca, WET) and 12V LiFePO₄ batteries
- 4 charge modes
- Easy to set up & use: connect, select a charge mode and forget
- Easy to read LED display
- Full protected against short circuit, wrong connections, overcharge and overheat
- Delivered with: 1 clamps set and 1 eyelet terminals set



FULLLOAD F4 (P/N: 750515)

Battery compatibility: Lead-acid & Lithium (LiFePO₄)

Voltage: 6V/12V

Charging rate: 2-4A

Battery capacity: Up to 80Ah (maintains all sizes)

Stages: 8

- Charges and maintains 6V/12V lead-acid batteries (GEL, AGM, MF, DRY, Ca/Ca, WET) and 12V LiFePO₄ batteries
- 7 charge modes including 12V repair mode
- Easy to set up & use: connect, select a charge mode and forget
- Easy to read LED display
- Full protected against short circuit, wrong connections, overcharge and overheat
- Delivered with: 1 clamps set and 1 eyelet terminals set



CHARGERS



FULBANK 2000 (P/N: 750547)

Battery compatibility: Lead-acid & Lithium (LiFePO4)

Voltage: 6V/12V

Charging rate: 3X2A

Battery capacity: Up to 40Ah (120Ah in maintenance)

Stages: 4

- Charges & maintains 3 batteries with different voltage and technologies at once
- For all batteries: GEL, AGM, MF, DRY, Ca/Ca & LiFePO4
- Easy to read LED display
- Full protected against short circuit, wrong connections, overcharge and overheat
- Splash & dust proof (IP65)
- Delivered with: 3 clamps and 3 fused connection set



ASSEMBLY PARTS (P/N: 750518)

Box content:

2x black rails

12x screws

12x bolts fastening

- To mount up 2 Fulbank 2000 chargers on to battery display
- Up to 6 batteries charged at once
- Ideal to create a small charging station



BOOSTER

These accessories are ideal for the maintenance of all our ranges of batteries. Whatever your type of application (motorcycle, scooter, quad, jet-ski, lawn mower, etc.), you will always find the Fulbat accessory to maximize your battery's performance.

FULBOOST (P/N: 750553)

Function: Booster, powerbank & flashlight

Capacity: 4Ah

Start current: 800A

Peak current: 1600A

- Compact & powerful lithium booster rated at 1600A
- For vehicles equipped with a 12V Lead-acid battery
- Designed for gas engines up to 7.0L and diesel up to 6.0L
- Ultra-safe thanks to smart cables technology : spark-proof, short-circuit & reverse polarity protection
- Charger for all types of USB devices
- Ultra-bright 150 lumens LED flashlight with 3 modes: constant, SOS, flash



3 IN ONE



BOOSTER

For 12V vehicles



POWER BANK

For all electrical devices



TORCH

3 light modes



Constant

SOS

Strobe

TESTER & ACCESSORIES



FULTEST 1 (P/N: 750502)

Function: Battery & alternator tester

- ↗ For 12V lead-acid batteries only
- ↗ Test the condition of the battery and alternator
- ↗ Control the right starting ability of the vehicle
- ↗ The ideal tool to verify the state of charge of the battery



FULTEST 2 (P/N: 750521)

Function: Battery & alternator tester

- ↗ For all 12V vehicle and motorcycles batteries (lithium & lead-acid)
- ↗ 3 battery tests: cold cranking amps, voltage, internal resistance
- ↗ Alternator and cranking system test
- ↗ Easy to read thanks to the large LCD screen



FULCONNECT INDICATOR (P/N: 750516)

Function: Battery tester
Chargers compatibility: Fulload 1000 / Fulload F4 / Fulbank 2000


- ↗ For 12V lead-acid batteries only
- ↗ Ideal solution if the battery is difficult to access
- ↗ To check the state of charge of the battery with its 3 integrated LEDs: green, orange, red
- ↗ Wire length: 500mm
- ↗ M8 eyelet terminal



FULCONNECT (P/N: 750507)


Chargers compatibility: Fulload 1000 / Fulload F4 / Fulbank 2000

- ↗ For 12V lead-acid & lithium batteries
- ↗ Ideal solution if the battery is difficult to access
- ↗ Wire length: 600mm
- ↗ M6 eyelet terminal


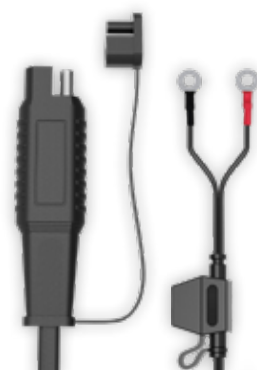




Visit our website for more information
www.fulbat.com



DISCOVER **FULBAT** RANGES

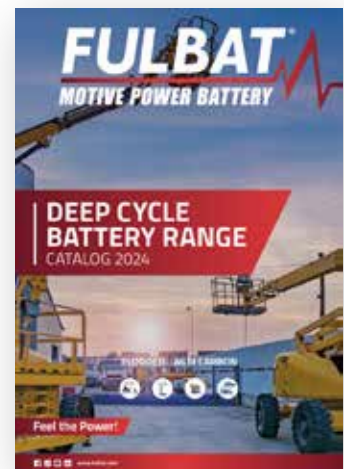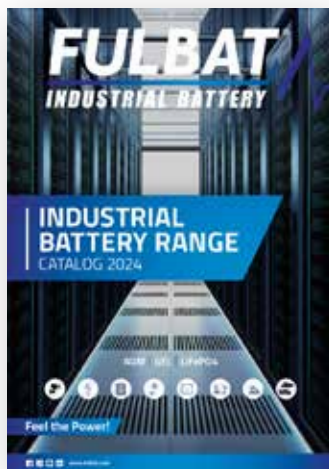

Release 2024.09