

SPECIFICATION

VOLTAGE
12.8v

CAPACITY (10h)
3.0Ah

CCA (EN)
210A

ENERGY
38.4Wh

CHARGING CURRENT STD.

1.5A

CHARGING CURRENT MAX.

6.0A

DIMENSIONS & WEIGHT

| | |
|--------------|---------|
| LENGTH | 150±2mm |
| WIDTH | 87±2mm |
| TOTAL HEIGHT | 105±2mm |
| GROSS WEIGHT | 0.61kg |

NON-SPILLABLE

LiFePO4

TERMINAL

Front




Side



Top



3D

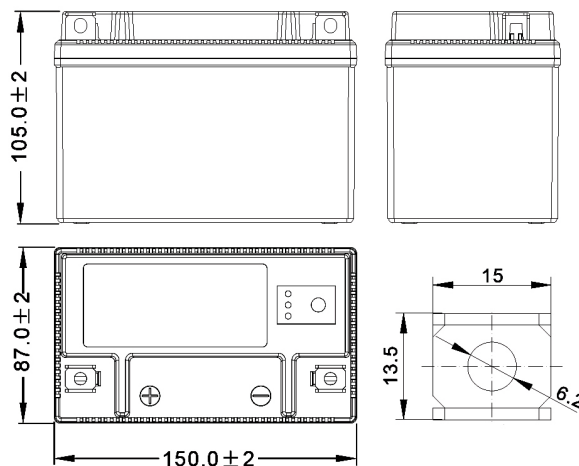

FEATURES

- EQUIVALENT LEAD ACID BATTERY TYPES:FTX9-BS
- OUTSTANDING SAFETY FEATURES
- ULTRA LIGHT WEIGHT
- MAINTENANCE FREE AND READY TO USE
- FAST CHARGING CAPABILITIES
- HIGH COLD CRANKING PERFORMANCE
- LONG SHELF-LIFE
- VERY LOW SELF-DISCHARGE
- ENVIRONMENTAL FRIENDLY
- COVER MOST OF EXISTING PARC APPLICATION
- EFFICIENT CHARGING INDICATOR

POLARITY



MOUNTING ANGLES

