

**+**  
**-** **DRY**

## TERMINAL

Front



Side



Top



3D



## FEATURES

- LEAD ACID DRY CHARGED CONSTRUCTION
- NO ACID IN CELLS BEFORE ACTIVATION
- NEED TO BE FILLED BEFORE FIRST USE
- HAS TO BE CHECKED PERIODICALLY AND REFILLED IF NECESSARY
- UPRIGHT INSTALLATION ONLY
- REGULAR LIFE DURATION
- DOESN'T NEED TO BE RECHARGED DURING SHELF LIFE

## SPECIFICATION

VOLTAGE

**12v**

CAPACITY (20h)

**25.3Ah**

CCA (EN)



**240A**

CAPACITY (10h)

**24.0Ah**

## DIMENSIONS & WEIGHT

LENGTH	195±2mm
WIDTH	130±2mm
TOTAL HEIGHT	180±2mm
GROSS WEIGHT	7.88kg

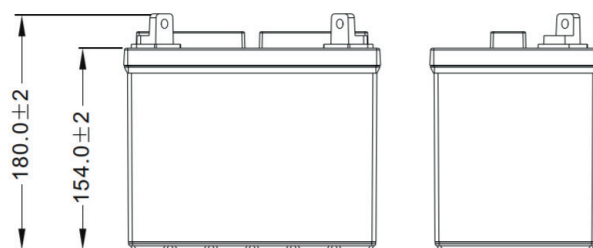

## POLARITY



## MOUNTING ANGLES

