


# DRY RANGE

Easy to store

DRY battery range offers an incomparable choice of 6V and 12V models. Delivered with an acid pack, the DRY battery must be activated before the first use and must be checked periodically. DRY construction, no maintenance is necessary during a long period of storage.


## FEATURES

- ✓ DRY charged construction
- ✓ Activation before first use
- ✓ Periodically maintenance and refilled if necessary
- ✓ Upright installation only
- ✓ 6V & 12V batteries
- ✓ Regular life duration
- ✓ Unlimited shelf life

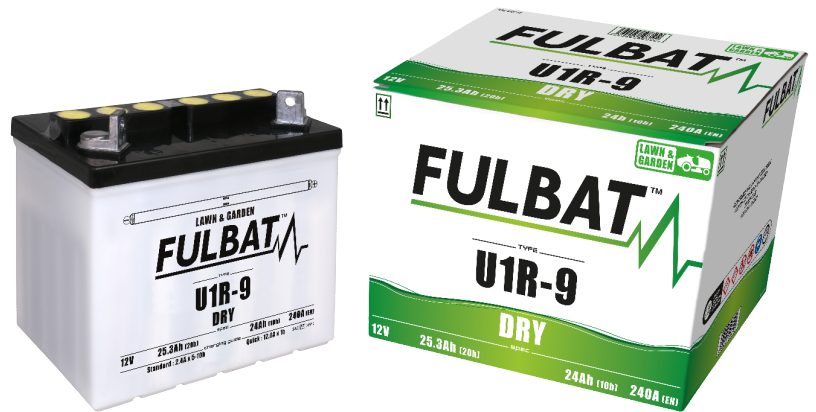

## COMPATIBLE CHARGERS

- ✓ Fulload 1000
- ✓ Fulbank 2000
- ✓ Fulload F4



Fulbat designation	Voltage (V)	Capacity Ah (10h)	Capacity Ah (20h)	CCA A (-18°C)	Dimensions (±2mm)			Assembly drawing	Terminal 3D
					L	W	H		
12N12A-4A-1 (FB12A-A)	12	12	12.6	155	134	80	160		
12N14-3A (FB14L-A2)	12	14	14.7	125	134	89	166		
12N14-4A (FB14-A2)	12	14	14.7	125	134	89	166		
12N18-3A	12	18	18.9	170	205	90	162		
12N18-4A	12	18	18.9	170	205	90	162		
F50-N18L-A	12	20	21.1	260	205	90	162		
F50-N18A-A	12	20	21.1	260	205	90	176		
12N24-3A	12	24	25.3	220	184	124	175		
12N24-4A	12	24	25.3	220	184	124	175		
U1-9	12	24	25.3	240	195	130	180		
U1R-9	12	24	25.3	240	195	130	180		
53030 (F60-N30L-A)	12	-	30	300	186	130	171		
53034 (F60-N30-A)	12	-	30	300	186	130	171		