

FLTZ7S

Datasheet



LiFePO4
NON-SPILLABLE

The new Lithium range is designed to offer the ultimate riding experience.

With ultra-light weight conception and ready to use, this LiFePO4 range will ensure faster acceleration, extreme starting performance, very low self-discharge and extreme cycle life.


Fulbat Lithium range is ideal for the most demanding riders.

SPECIFICATIONS

Voltage	Capacity	CCA (EN)
12.8V	2.0Ah (10hr)	140A
Energy	Charging current std.	Charging current max
25.6Wh	1.0A	4.0A

DIMENSIONS & WEIGHT

Length	113±2mm
Width	70±2mm
Total Height	85±2mm
Gross weight	0.42kg

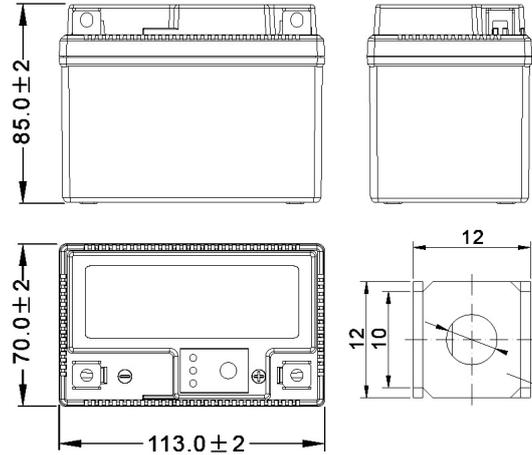

FEATURES

- Ultra lightweight
- High cold cranking performance
- Maintenance free and ready to use
- Multi-positional fitment
- Very low self-discharge
- Long life time
- Outstanding safety features
- Fast charging capabilities
- Integrated battery tester


POLARITY



MOUNTING ANGLES



TERMINAL

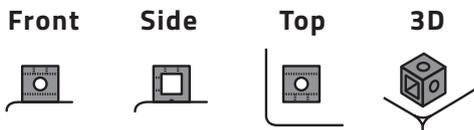

APPLICATIONS

