FDC12-115 Datasheet








FDC Series are Deep Cycle AGM Carbon batteries specifically designed for frequent discharge deep cycle application. With non-spillable design and maintenance free, AGM FDC Series offer low self-discharge and ensure a maximum service life with high resistance to cycles. Thanks to carbon additives, these batteries can perfectly be used with good performance without being 100% charged. This range offers reliable performance for electric vehicle and other applications such as golf cart, aerial work platform, cleaning machine, marine, solar energy...

A FEATURES

- Deep Cycle AGM technology (VRLA)
- Non-spillable & maintenance free
- No acid handling
- Deep Cycle design for high capacity and maximum life .
- Reinforced grid/plates design for optimal cyclic use
- Robust, safe & reliable
- Carbon additives to perform in Partial State of Charge (PSOC) and to increase charging efficiency
- Low self-discharge rate for longer shelf life

M TERMINAL



A SPECIFICATIONS

Voltage	Capacity	Reserve capacity
12 V	130 Ah (100hr)	239 min (25A)
	118 Ah (20hr)	65 min (75A)
	113 Ah (10hr)	
	107 Ah (5hr)	


OPERATING TEMPERATURE

Discharge	-15°C ~ 50°C		
Charge	0°C ~ 40°C		
Storage	-15°C ~ 40°C		
CHARGING INSTRUCTIONS			
Max current	17.3A		

A DIMENSIONS & WEIGHT

Cyclic

Length	330±2mm
Width	173±2mm
Total Height	220±2mm
Gross weight	31.3kg

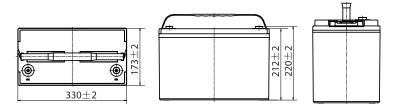

APPLICATIONS A





Golf cart





14.7V - 14.9V

Aerial work platform

Floor cleaning machine

Solar












M FDC AGM CHARGING PROFILE

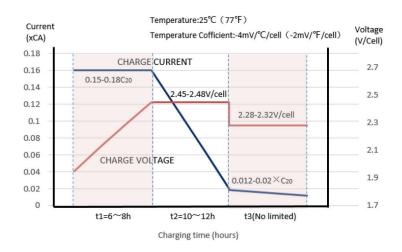

RELATIONSHIP OF OCV AND STATE OF CHARGE (25°C)

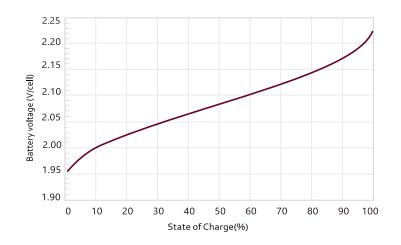

A CYCLE LIFE IN RELATION TO DEPTH OF DISCHARGE

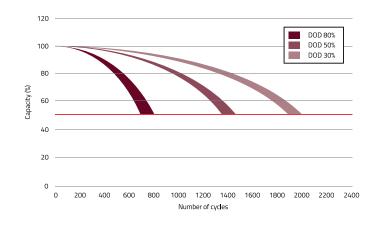

M SELF-DISCHARGE CHARACTERISTIC

