

# FLTX7L - FLTZ7S

## Datasheet



**LiFePO4**  
NON-SPILLABLE



The new Lithium range is designed to offer the ultimate riding experience.

Ready to use and with ultra-light weight conception, this LiFePO4 range will ensure extreme starting performance, very low self-discharge and extreme cycle life. Thanks to the Battery Management System integrated, these batteries offer a very safe solution, ideal for the most demanding riders.


### FEATURES

- Ready to use & Maintenance Free
- Ultra lightweight compare to lead acid battery
- Very high cold cranking performance
- Ultra safe thanks to the integrated BMS
- Very fast recharge
- Multi-positional fitment
- Integrated LCD battery tester
- Very low self-discharge

### BATTERY REPLACEMENT

- FTX5L-BS/FTZ6S
- FTZ8V
- FTX7L-BS
- FTZ7S
- FTZ7V

### TERMINAL

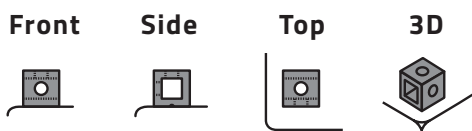

### SPECIFICATIONS


Voltage	Capacity	CCA (EN)
<b>12.8V</b>	<b>3.0Ah</b>	<b>180A</b>
Energy	Charging current std.	Charging current max
<b>38.4Wh</b>	<b>1.5A</b>	<b>3.0A</b>

#### BMS FUNCTION:

- Over discharge protection
- Over charge protection
- Cell equalization

### DIMENSIONS & WEIGHT


Length	113±2mm
Width	70±2mm
Total Height	105±2mm
Gross weight	0.70kg

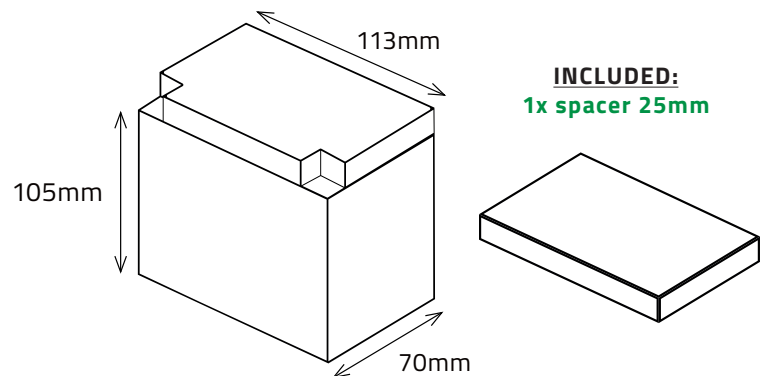

### POLARITY



### MOUNTING ANGLES



### APPLICATIONS

