FDC6-265 Datasheet









FDC Series are Deep Cycle AGM Carbon batteries specifically designed for frequent discharge deep cycle application. With non-spillable design and maintenance free, AGM FDC Series offer low self-discharge and ensure a maximum service life with high resistance to cycles. Thanks to carbon additives, these batteries can perfectly be used with good performance without being 100% charged. This range offers reliable performance for electric vehicle and other applications such as golf cart, aerial work platform, cleaning machine, marine, solar energy...

₼ **FEATURES**

- Deep Cycle AGM technology (VRLA)
- Non-spillable & maintenance free
- No acid handling
- Deep Cycle design for high capacity and maximum life
- Reinforced grid/plates design for optimal cyclic use
- Robust, safe & reliable
- Carbon additives to perform in Partial State of Charge (PSOC) and to increase charging efficiency
- Low self-discharge rate for longer shelf life

Reserve capacity Voltage Capacity 6 V 285 Ah (100hr) 650 min (25A)

268 Ah (20hr) 256 min (56A)

255 Ah (10hr) 165 min (75A)

230 Ah (5hr)

OPERATING TEMPERATURE


Discharge	-15°C ~ 50°C
Charge	0°C ~ 40°C
Storage	-15°C ~ 40°C


CHARGING INSTRUCTIONS


Max current	53.6A
Float	6.85V - 6.95V
Cyclic	7.35V - 6.45V

√ DIMENSIONS & WEIGHT

Length	262±2mm
Width	180±2mm
Total Height	268±2mm
Gross weight	32 9kg








A TERMINAL





APPLICATIONS



Aerial work platform



Golf cart





machine










FDC6-265

Datasheet



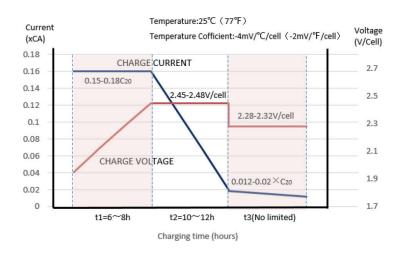

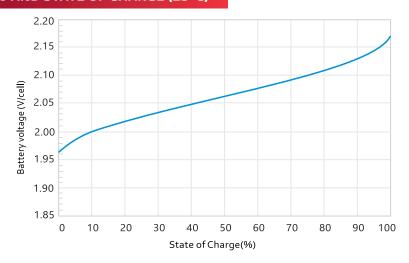

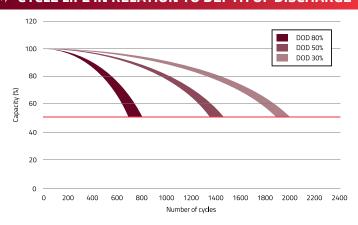

SELF-DISCHARGE CHARACTERISTIC

