

GEL RANGE

Ready to use & maintenance free

The Gel battery range is designed to offer maximum performance and safety! Ready to use, the GEL battery will not require any acid handling, initial preparation or maintenance. Non-spillable design (VRLA) linked to its high performance make it the ideal battery for all powersports.

FEATURES


- Ready to use
- 100% maintenance free
- Easy to install
- Factory activated (VRLA design)
- Non-spillable: easy to ship
- Multi-positional fitment
- Suitable for cold weather
- No acid handling
- Increased life time



COMPATIBLE CHARGERS

- Fulload 1000
- Fulbank 2000
- Fulload F4

NON-SPILLABLE



Fulbat designation	Voltage (V)	Capacity Ah (10h)	Capacity Ah (20h)	CCA A (-18°C)	Dimensions (±2mm)			Assembly drawing	Terminal 3D
					L	W	H		
6N4-2A/A-4	6	4	4.2	25	71	71	93		
6N6-3B/B-1	6	6	6.3	50	95	55	117		
B49-6	6	10	10.5	80	91	83	159		
B38-6A	6	13	13.7	105	119	83	161		
6N11A-1B/3A	6	11	11.6	90	121	58	130		
6N11A-4A	6	11	11.6	90	121	58	130		
12N5.5-3B	12	5.5	5.8	70	135	60	130		
12N5.5-4A	12	5.5	5.8	70	135	60	130		
FB3L-A/B	12	3	3.2	35	98	56	110		
FB4L-B	12	5	5.3	50	120	70	92		
FB5L-B	12	5	5.3	65	120	60	130		
FB7-A	12	8	8.4	120	135	75	133		
FB7C-A	12	8	8.4	85	129	89	114		
FB7L-B/B2	12	8	8.4	100	136	76	130		
FB9-B (12N9-4B-1)	12	9	9.5	115	135	75	139		
FB10L-A2/B2	12	11	11.6	120	133	90	145		
FB12A-A/B (12N12A-4A-1)	12	12	12.6	155	134	80	161		
FB12AL-A2	12	12	12.6	150	134	80	161		
FB14A-A2	12	14	14.7	200	134	88	176		
FB16AL-A2	12	16	16.8	210	205	70	162		

Fulbat designation	Voltage (V)	Capacity Ah (10h)	Capacity Ah (20h)	CCA A (-18°C)	Dimensions (±2mm)			Assembly drawing	Terminal 3D
					L	W	H		
FB16CL-B	12	19	20	240	175	100	175		
FT4B-BS	12	2.3	2.4	40	113	38	85		
FTR4A-BS	12	2.3	2.4	45	113	48	85		
FTX4L-BS/FTZ5S	12	5	5.3	70	113	70	85		
FTX5L-BS/FTZ6S	12	5	5.3	90	113	70	105		
FTX6.5L-BS	12	6.5	6.8	85	147	73	112		
FTX7L-BS	12	6	6.3	100	113	70	130		
FTX7A-BS	12	6	6.3	90	150	87	93		
FTX9-BS	12	8	8.4	135	150	87	105		
FT12A-BS	12	10	10.5	175	150	88	105		
FTX12-BS	12	10	10.5	180	150	87	130		
FTX14-BS	12	12	12.6	200	150	87	145		
FTX14L-BS	12	12	12.6	200	150	87	145		
FTX14AH-BS/FB14-A2/B2 (12N14-4A)	12	14	14.7	210	135	90	167		
FTX14AHL-BS/FB14L-A2/B2 (12N14-3A)	12	14	14.7	210	135	90	167		
FTX16	12	14	14.7	230	150	87	161		
FTX20-BS	12	18	18.9	310	175	87	155		
FTX20A-BS	12	18	18.9	270	150	57	161		
FTX20HL-BS	12	18	18.9	310	175	87	155		
FTX24HL-BS/F50-N18L-A/A2/A3 (12N18-3A)	12	21	22.1	350	205	87	162		
FIX30L-BS	12	30	31.6	400	165	125	175		
FTZ7S	12	6	6.3	130	113	70	105		
FT7B-4	12	6.5	6.8	110	150	65	93		
FTZ7V	12	6.5	6.8	105	113	70	121		
FTZ8V	12	7	7.4	120	113	70	130		
FT9B-4	12	8	8.4	120	150	68	105		
FTZ10S	12	8.6	9.1	190	150	88	93		
FTZ12S	12	11	11.6	210	150	88	110		
FT12-10Z	12	10	10.5	180	194	59	112		
FT12B-4	12	10	10.5	210	150	69	130		
FTZ14S	12	11.2	11.8	230	150	88	110		
FT14B-4	12	12	12.6	210	150	69	145		
53030 (F60-N30L-A)	12	30	31.6	300	178	123	166		
53034 (F60-N30-A)	12	30	31.6	300	178	123	166		



GEL FitHD RANGE

High capacity reinforced battery

The Gel FitHD range are high capacity batteries designed for Harley Davidson motorcycles as well as for Heavy Duty applications. With specific terminals and reinforced battery case, these batteries offer a maximum vibration resistance and higher starting power.

FEATURES

- ✓ Ready to use
- ✓ 100% maintenance free
- ✓ Easy to install
- ✓ Specific HD terminals*
- ✓ Reinforced battery case
- ✓ Factory activated (VRLA)
- ✓ Non-spillable: easy to ship
- ✓ Multi-positional fitment
- ✓ Suitable for cold weather
- ✓ No acid handling
- ✓ Increased life time

*Only for FHD battery models



COMPATIBLE CHARGERS

- ✓ Fulload 1000
- ✓ Fulbank 2000
- ✓ Fulload F4



Fulbat designation	Voltage (V)	Capacity Ah (10h)	Capacity Ah (20h)	CCA A (-18°C)	Dimensions (±2mm)			Assembly drawing	Terminal 3D
					L	W	H		
NH12-20 (BMW)	12	20	21.1	250	186	82	171		
FHD14HL-BS	12	14	14.7	220	150	87	145		
FHD20HL-BS	12	20	21.1	310	175	87	155		
FHD30HL-BS	12	30	31.6	430	165	130	175		



Feel the Power!

UPGRADE CROSS REFERENCE CHART

DRY	MF	GEL	LITHIUM
6N4-2A ; 6N4-2A-4		6N4-2A/A-4 GEL	
6N6-3B ; 6N6-3B-1		6N6-3B/B-1 GEL	
B49-6		B49-6 GEL	
B38-6A		B38-6A GEL	
6N11A-1B ; 6N11A-3A		6N11A-1B/3A GEL	
12N5.5-3B		12N5.5-3B GEL	
12N5.5-4A		12N5.5-4A GEL	
FB3L-A ; FB3L-B		FB3L-A/B GEL	
FB4L-B		FB4L-B GEL	FLTX4L/5L / FLTZ5S/6S
FB5L-B ; 12N5-3B		FB5L-B GEL	
12N7-4A ; FB7-A		FB7-A GEL	
FB7C-A		FB7C-A GEL	
FB7L-B ; FB7L-B2 ; 12N7-3B		FB7L-B/B2 GEL	FLTX7L/FLTZ7S
FB9-B ; 12N9-4B1	FT9A-BS	FB9-B GEL	
FB10L-A2 ; FB10L-B2 ; 12N10-3A/B		FB10L-A2/B2 GEL	
FB12AL-A ; FB12AL-A2		FB12AL-A2 GEL	
FB12A-A ; FB12A-B ; 12N12A-4A-1		FB12A-A/B GEL	
FB14A-A1 ; FB14A-A2		FB14A-A2 GEL	
FB16AL-A2		FB16AL-A2 GEL	
FB16CL-B		FB16CL-B GEL	FLTX20HL
	FT4B-BS	FT4B-BS GEL	
	FTR4A-BS	FTR4A-BS GEL	
	FTX4L-BS/FTZ5S	FTX4L-BS/FTZ5S GEL	FLTX4L/5L / FLTZ5S/6S
	FTX5L-BS	FTX5L-BS/FTZ6S GEL	FLTX4L/5L / FLTZ5S/6S
	FTX7A-BS	FTX7A-BS GEL	FLTX7A/9/12/14 / FLTZ10S/12S/14S
	FTX7L-BS	FTX7L-BS GEL	FLTX7L / FLTZ7S
	FTX9-BS	FTX9-BS GEL	FLTX7A/9/12/14 / FLTZ10S/12S/14S
	FT12A-BS	FT12A-BS GEL	FLTX7A/9/12/14 / FLTZ10S/12S/14S
	FTX12-BS	FTX12-BS GEL	FLTX7A/9/12/14 / FLTZ10S/12S/14S
	FTX14-BS	FTX14-BS GEL	FLTX7A/9/12/14 / FLTZ10S/12S/14S
	FTX14L-BS	FTX14L-BS GEL ; FHD14HL-BS GEL	
FB14-A2 ; FB14-B2 ; 12N14-4A	FTX14AH-BS	FTX14AH-BS/FB14-A2 GEL	
FB14L-A2 ; FB14L-B2 ; 12N14-3A	FTX14AHL-BS	FTX14AHL-BS/FB14L-A2 GEL	
	FTX16-BS	FTX16 GEL	
	FTX20-BS	FTX20-BS GEL	FLTX20H
	FTX20A-BS	FTX20A-BS GEL	
FB16L-B ; FB18L-A	FTX20L-BS	FTX20HL-BS GEL ; FHD20HL-BS GEL	FLTX20HL
12N18-3A ; F50-N18L-A ; F50-N18L-A3	FTX24HL-BS	FTX24HL-BS/F50-N18L-A/A2/A3 GEL	
FB30L-B	FIX30L-BS	FIX30L-BS GEL ; FHD30HL-BS GEL	
		FTZ7V	FLTX7L / FLTZ7S
		FTZ7S GEL ; FTZ8V GEL	FLTX7L / FLTZ7S
		FT7B-4 GEL	FLT7B/9B
		FT9B-4 GEL	FLT7B/9B
		FTZ10S GEL	FLTX7A/9/12/14 / FLTZ10S/12S/14S
		FTZ12S GEL	FLTX7A/9/12/14 / FLTZ10S/12S/14S
		FT12B-4 GEL	FLT12B/14B
		FTZ14S GEL	FLTX7A/9/12/14 / FLTZ10S/12S/14S
		FT14B-4 GEL	FLT12B/14B
51814 ; 51913		NH12-20 GEL	
53030 ; F60-N30L-A		53030 GEL	FLTX30HL
53034 ; F60-N30-A		53034 GEL	

LITHIUM

Ready to use
High CCA performance
Ultra lightweight




GEL

Ready to use
100% maintenance free
Non-spillable



MF

100% maintenance free
Higher cycle life
Unlimited shelf life

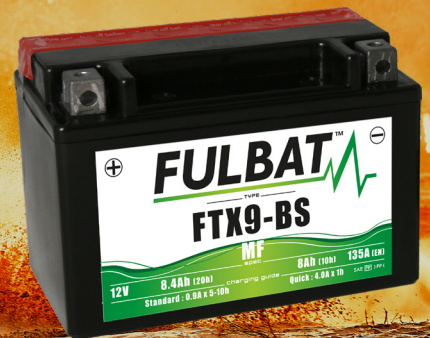

DRY

DRY charged construction
6 & 12V batteries
Unlimited shelf life

