FLP12-36

Datasheet






LIFePO4 NON-SPILLABLE



FLP Series are Lithium Iron Phosphate (LiFePO4) batteries specially designed to replace lead acid batteries thanks to their standard size cases and their similar charging voltage. The FLP Series offer many advantages compared to lead acid in terms of weight, cyclic performance, safety and power. This range is ideal for applications that require a higher powerweight ratio and with minimal service or replacement requirements.

A DIMENSIONS & WEIGHT

Lenght	195±2mm
Width	130±2mm
Total height	162±2mm
Gross weight	/, /,kg



A SPECIFICATIONS

Nominal voltage

monimar voitage	12.00 (32700)
Nominal capacity	36Ah (5hr)
Energy	460.80Wh
Internal resistance	Approx 60mΩ
Cycle life	Up to 2000 cycles at 100% DOD*
	Up to 4000 cycles at 80% DOD*
Protection function	Over charge protection/Over
(BMS)	discharge protection/Over current
	protection/Temperature protection/
	Balanced function
Terminal	T6
Terminal Standard charge	T6
	T6 14.6±0.2V
Standard charge	
Standard charge Charge voltage	14.6±0.2V
Standard charge Charge voltage	14.6±0.2V Charge CC: 0.2C to 14.6V, then 14.6V
Standard charge Charge voltage Charge mode	14.6±0.2V Charge CC: 0.2C to 14.6V, then 14.6V until current drops to 0.02C
Standard charge Charge voltage Charge mode Charge current	14.6±0.2V Charge CC: 0.2C to 14.6V, then 14.6V until current drops to 0.02C 7.2A

12.8V (32700)

Discharge cut-off voltage

Max. continuous current

Max. pulse current

Operating temp. range Charge temperature 0°C to 45°C Discharge temperature -20°C to 60°C

0°C to 45°C Storage temperature Can be stored for up to 6 months at 25°C Self discharge

36A

10.0V

60A (≤3s)


and then recharging is recommended. Monthly self-discharge ratio is less than 3.5% at 25°C

Container material A.B.S.

APPROVALS

ISO9001 - Quality management system ISO14001 - Environnmental management System UN38.3 certified: approved for transport by Air (IATA)

₼ TERMINAL



APPLICATIONS











Renewable

Golf cart

Medical











FLP12-36


Datasheet




✓ DIFFERENT RATE DISCHARGE CURVE, 25°C

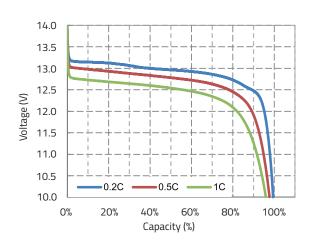

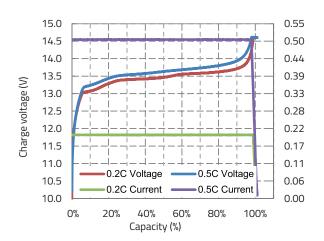


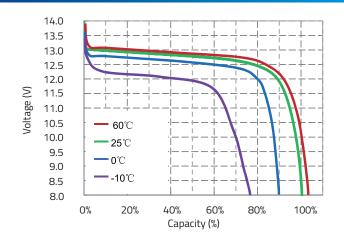

√ CHARGE CHARACTERISTICS, 0.2C & 0.5C, 25°C

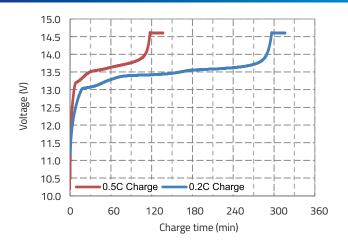

DIFFERENT DOD DISCHARGE CYCLE LIFE CURVE

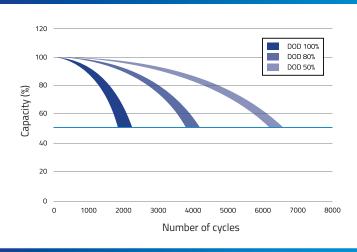

OPEN CIRCUIT VOLTAGE VS SOC%

