

GEL RANGE

Ready to use & maintenance free

The Gel battery range is designed to offer maximum performance and safety! Ready to use, the GEL battery will not require any acid handling, initial preparation or maintenance. Non-spillable design (VRLA) linked to its high performance make it the ideal battery for all powersports.

FEATURES


- ✔ Ready to use
- ✔ 100% maintenance free
- ✔ Easy to install
- ✔ Factory activated (VRLA design)
- ✔ Non-spillable: easy to ship
- ✔ Multi-positional fitment
- ✔ Suitable for cold weather
- ✔ No acid handling
- ✔ Increased life time



COMPATIBLE CHARGERS

- ✔ Fulload 1000
- ✔ Fulbank 2000
- ✔ Fulload F4

NON-SPILLABLE



Designation	P/N	Voltage (V)	Capacity Ah (10h)	Capacity Ah (20h)	CCA (A)	Dimensions (±2mm)			Polarity	Terminal 3D
						L	W	H		
6N4-2A/A-4	550959	6	4	4.2	25	71	71	93	⊖ ⊞ ⊞ ⊞	-
6N6-3B/B-1	550960	6	6	6.3	50	95	55	117	⊖ ⊞ ⊞ ⊞	⊞
B49-6	550961	6	10	10.5	80	91	83	159	⊞ ⊞ ⊞ ⊞	⊞
B38-6A	550962	6	13	13.7	105	119	83	161	⊖ ⊞ ⊞ ⊞	⊞
6N11A-1B/3A	550957	6	11	11.6	90	121	58	130	⊖ ⊞ ⊞ ⊞	⊞
6N11A-4A	550958	6	11	11.6	90	121	58	130	⊞ ⊞ ⊞ ⊞	⊞
12N5.5-3B	550980	12	5.5	5.8	70	135	60	130	⊞ ⊞ ⊞ ⊞	⊞
12N5.5-4A	550981	12	5.5	5.8	70	135	60	130	⊞ ⊞ ⊞ ⊞	⊞
FB3L-A/B	550842	12	3	3.2	35	98	56	110	⊞ ⊞ ⊞ ⊞	⊞
FB4L-B	550916	12	5	5.3	50	120	70	92	⊞ ⊞ ⊞ ⊞	⊞
FB5L-B	550991	12	5	5.3	65	120	60	130	⊞ ⊞ ⊞ ⊞	⊞
FB7-A	550992	12	8	8.4	120	135	75	133	⊞ ⊞ ⊞ ⊞	⊞
FB7C-A	550989	12	8	8.4	85	129	89	114	⊞ ⊞ ⊞ ⊞	⊞
FB7L-B/B2	550995	12	8	8.4	100	136	76	130	⊞ ⊞ ⊞ ⊞	⊞
FB9-B (12N9-4B-1)	550925	12	9	9.5	115	135	75	139	⊞ ⊞ ⊞ ⊞	⊞
FB10L-A2/B2	550956	12	11	11.6	120	133	90	145	⊞ ⊞ ⊞ ⊞	⊞
FB12A-A/B (12N12A-4A-1)	550947	12	12	12.6	155	134	80	161	⊞ ⊞ ⊞ ⊞	⊞
FB12AL-A2	550926	12	12	12.6	150	134	80	161	⊞ ⊞ ⊞ ⊞	⊞
FB14A-A2	550971	12	14	14.7	200	134	88	176	⊞ ⊞ ⊞ ⊞	⊞
FB16AL-A2	550948	12	16	16.8	210	205	70	162	⊞ ⊞ ⊞ ⊞	⊞

Designation	P/N	Voltage (V)	Capacity Ah (10h)	Capacity Ah (20h)	CCA (A)	Dimensions (±2mm)			Polarity	Terminal 3D
						L	W	H		
FB16CL-B	550979	12	19	20	240	175	100	175	+	
FT4B-BS	550949	12	2.3	2.4	40	113	38	85	+	
FTR4A-BS	550950	12	2.3	2.4	45	113	48	85	+	
FTX4L-BS/FTZ5S	550671	12	5	5.3	70	113	70	85	+	
FTX5L-BS/FTZ6S	550919	12	5	5.3	90	113	70	105	+	
FTX6.5L-BS	550963	12	6.5	6.8	85	147	73	112	+	
FTX7L-BS	550920	12	6	6.3	100	113	70	130	+	
FTX7A-BS	550915	12	6	6.3	90	150	87	93	+	
FTX9-BS	550921	12	8	8.4	135	150	87	105	+	
FT12A-BS	550679	12	10	10.5	175	150	88	105	+	
FTX12-BS	550922	12	10	10.5	180	150	87	130	+	
FTX14-BS	550923	12	12	12.6	200	150	87	145	+	
FTX14L-BS	550990	12	12	12.6	200	150	87	145	+	
FTX14AH-BS/FB14-A2/B2 (12N14-4A)	550946	12	14	14.7	210	135	90	167	+	
FTX14AHL-BS/FB14L-A2/B2 (12N14-3A)	550927	12	14	14.7	210	135	90	167	+	
FTX16	550763	12	14	14.7	230	150	87	161	+	
FTX20-BS	550993	12	18	18.9	310	175	87	155	+	
FTX20A-BS	550994	12	18	18.9	270	150	57	161	+	
FTX20HL-BS	550924	12	18	18.9	310	175	87	155	+	
FTX24HL-BS/F50-N18L-A/A2/A3 (12N18-3A)	550982	12	21	22.1	350	205	87	162	+	
FIX30L-BS	550943	12	30	31.6	400	165	125	175	+	
FTZ7S	550635	12	6	6.3	130	113	70	105	+	
FT7B-4	550641	12	6.5	6.8	110	150	65	93	+	
FTZ7V	550998	12	6.5	6.8	105	113	70	121	+	
FTZ8V	550918	12	7	7.4	120	113	70	130	+	
FT9B-4	550642	12	8	8.4	120	150	68	105	+	
FTZ10S	550636	12	8.6	9.1	190	150	88	93	+	
FTZ12S	550637	12	11	11.6	210	150	88	110	+	
FT12-10Z	550999	12	10	10.5	180	194	59	112	+	
FT12B-4	550643	12	10	10.5	210	150	69	130	+	
FTZ14S	550638	12	11.2	11.8	230	150	88	110	+	
FT14B-4	550644	12	12	12.6	210	150	69	145	+	
53030 (F60-N30L-A)	550945	12	30	31.6	300	178	123	166	+	
53034 (F60-N30-A)	550843	12	30	31.6	300	178	123	166	+	



GEL FitHD RANGE

High capacity reinforced battery

The Gel FitHD range are high capacity batteries designed for Heavy Duty applications. With specific terminals and reinforced battery case, these batteries offer a maximum vibration resistance and higher starting power.

FEATURES

- ✔ Ready to use
- ✔ 100% maintenance free
- ✔ Easy to install
- ✔ Specific HD terminals*
- ✔ Reinforced battery case
- ✔ Factory activated (VRLA)
- ✔ Non-spillable: easy to ship
- ✔ Multi-positional fitment
- ✔ Suitable for cold weather
- ✔ No acid handling
- ✔ Increased life time

*Only for FHD battery models



COMPATIBLE CHARGERS

- ✔ Fulload 1000
- ✔ Fulbank 2000
- ✔ Fulload F4



Designation	P/N	Voltage (V)	Capacity Ah (10h)	Capacity Ah (20h)	CCA (A)	Dimensions (±2mm)			Polarity	Terminal 3D
						L	W	H		
NH12-20 (BMW)	550917	12	20	21.1	250	186	82	171	⊖ ⊖ ⊖ ⊖ ⊕	
FHD14HL-BS	550880	12	14	14.7	220	150	87	145	⊖ ⊖ ⊖ ⊖ ⊕	
FHD20HL-BS	550881	12	20	21.1	310	175	87	155	⊖ ⊖ ⊖ ⊖ ⊕	
FHD30HL-BS	550882	12	30	31.6	430	165	130	175	⊖ ⊖ ⊖ ⊖ ⊕	




Feel the Power!

UPGRADE CROSS REFERENCE CHART

DRY	MF	GEL	LITHIUM
6N4-2A ; 6N4-2A-4		6N4-2A/A-4 GEL	
6N6-3B ; 6N6-3B-1		6N6-3B/B-1 GEL	
B49-6		B49-6 GEL	
B38-6A		B38-6A GEL	
6N11A-1B ; 6N11A-3A		6N11A-1B/3A GEL	
12N5.5-3B		12N5.5-3B GEL	
12N5.5-4A		12N5.5-4A GEL	
FB3L-A ; FB3L-B		FB3L-A/B GEL	
FB4L-B		FB4L-B GEL	FLTX4L/5L/7L / FLTZ5S/6S/7S
FB5L-B ; 12N5-3B		FB5L-B GEL	
12N7-4A ; FB7-A		FB7-A GEL	
FB7C-A		FB7C-A GEL	
FB7L-B ; FB7L-B2 ; 12N7-3B		FB7L-B/B2 GEL	FLTX4L/5L/7L / FLTZ5S/6S/7S
FB9-B ; 12N9-4B1	FT9A-BS	FB9-B GEL	
FB10L-A2 ; FB10L-B2 ; 12N10-3A/B		FB10L-A2/B2 GEL	
FB12AL-A ; FB12AL-A2		FB12AL-A2 GEL	
FB12A-A ; FB12A-B ; 12N12A-4A-1		FB12A-A/B GEL	
FB14A-A1 ; FB14A-A2		FB14A-A2 GEL	
FB16AL-A2		FB16AL-A2 GEL	
FB16CL-B		FB16CL-B GEL	FLTX20HL
	FT4B-BS	FT4B-BS GEL	
	FTR4A-BS	FTR4A-BS GEL	
	FTX4L-BS/FTZ5S	FTX4L-BS/FTZ5S GEL	FLTX4L/5L/7L - FLTZ5S/6S/7S
	FTX5L-BS	FTX5L-BS/FTZ6S GEL	FLTX4L/5L/7L / FLTZ5S/6S/7S
	FTX7A-BS	FTX7A-BS GEL	FLTX7A/9/12/14 / FLTZ10S/12S/14S
	FTX7L-BS	FTX7L-BS GEL	FLTX4L/5L/7L / FLTZ5S/6S/7S
	FTX9-BS	FTX9-BS GEL	FLTX7A/9/12/14 / FLTZ10S/12S/14S
	FT12A-BS	FT12A-BS GEL	FLTX7A/9/12/14 / FLTZ10S/12S/14S
	FTX12-BS	FTX12-BS GEL	FLTX7A/9/12/14 / FLTZ10S/12S/14S
	FTX14-BS	FTX14-BS GEL	FLTX7A/9/12/14 / FLTZ10S/12S/14S
	FTX14L-BS	FTX14L-BS GEL ; FHD14HL-BS GEL	
FB14-A2 ; FB14-B2 ; 12N14-4A	FTX14AH-BS	FTX14AH-BS/FB14-A2 GEL	
FB14L-A2 ; FB14L-B2 ; 12N14-3A	FTX14AHL-BS	FTX14AHL-BS/FB14L-A2 GEL	
	FTX16-BS	FTX16 GEL	
	FTX20-BS	FTX20-BS GEL	FLTX20H
	FTX20A-BS	FTX20A-BS GEL	
FB16L-B ; FB18L-A	FTX20L-BS	FTX20HL-BS GEL ; FHD20HL-BS GEL	FLTX20HL
12N18-3A ; F50-N18L-A ; F50-N18L-A3	FTX24HL-BS	FTX24HL-BS/F50-N18L-A/A2/A3 GEL	
FB30L-B	FIX30L-BS	FIX30L-BS GEL ; FHD30HL-BS GEL	
		FTZ7V	FLTX4L/5L/7L / FLTZ5S/6S/7S
		FTZ7S GEL ; FTZ8V GEL	FLTX4L/5L/7L / FLTZ5S/6S/7S
		FT7B-4 GEL	FLT7B/9B
		FT9B-4 GEL	FLT7B/9B
		FTZ10S GEL	FLTX7A/9/12/14 / FLTZ10S/12S/14S
		FTZ12S GEL	FLTX7A/9/12/14 / FLTZ10S/12S/14S
		FT12B-4 GEL	FLT12B/14B
		FTZ14S GEL	FLTX7A/9/12/14 / FLTZ10S/12S/14S
		FT14B-4 GEL	FLT12B/14B
51814 ; 51913		NH12-20 GEL	
53030 ; F60-N30L-A		53030 GEL	FLTX30HL
53034 ; F60-N30-A		53034 GEL	


LITHIUM

Ready to use
High CCA performance
Ultra lightweight





GEL

Ready to use
100% maintenance free
Non-spillable

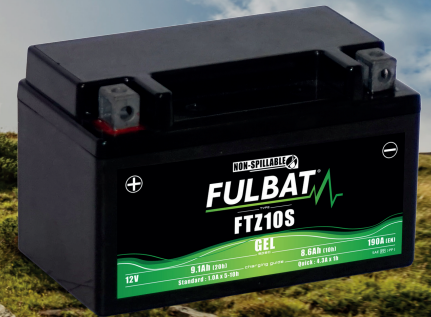

MF

100% maintenance free
Higher cycle life
Unlimited shelf life

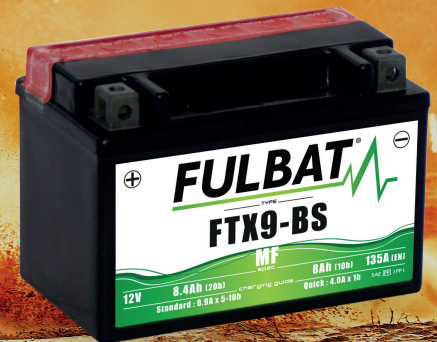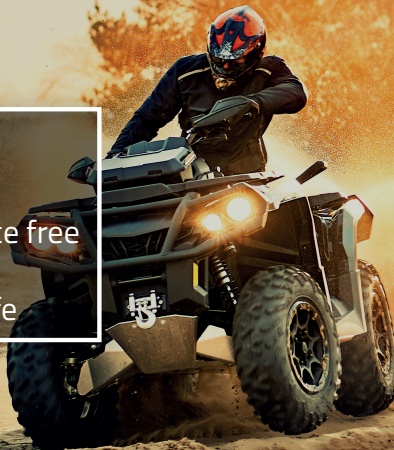

DRY

DRY charged construction
6 & 12V batteries
Unlimited shelf life

