

FLTX7A/9 / FLTZ10S

Datasheet



SPECIFICATIONS


Voltage	Capacity	CCA
12.8V	3.0Ah	180A
Energy	Charging current std.	Charging current max
38.4Wh	1.5A	3.0A

BMS FUNCTION:

- Over discharge protection
- Over charge protection
- Cell equalization

DIMENSIONS & WEIGHT

Length	150±2mm
Width	87±2mm
Total Height	93±2mm
Gross weight	0.65kg

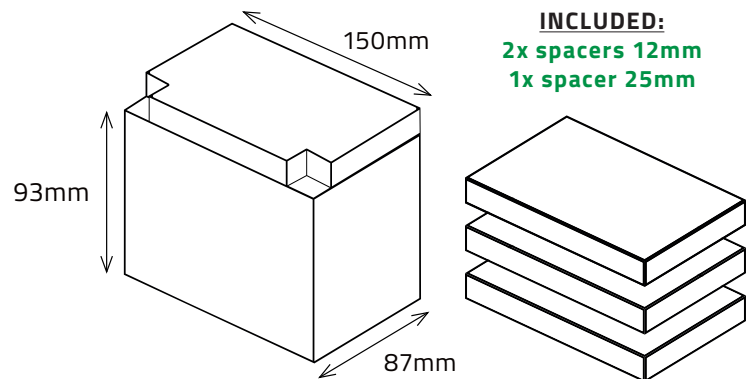

LiFePO₄
NON-SPILLABLE



The new Lithium range is designed to offer the ultimate riding experience.

Ready to use and with ultra-light weight conception, this LiFePO₄ range will ensure extreme starting performance, very low self-discharge and extreme cycle life. Thanks to the Battery Management System integrated, these batteries offer a very safe solution, ideal for the most demanding riders.

FEATURES

- Ready to use & Maintenance Free
- Ultra lightweight compare to lead acid battery
- Very high cold cranking performance
- Ultra safe thanks to the integrated BMS
- Very fast recharge
- Multi-positional fitment
- Integrated LCD battery tester
- Very low self-discharge

BATTERY REPLACEMENT

- FTX7A-BS
- FTX9-BS
- FTZ10S

TERMINAL

Front



Side



Top




3D



POLARITY



MOUNTING ANGLES



APPLICATIONS



Motorcycle



Scooter



ATV



SSV & UTV



Snowmobile



Watercraft