

FB14-A2 12N14-4A

Datasheet



+
- **DRY**



Dry battery range offers an incomparable choice of 6V and 12V models. Delivered with an acid pack, Dry battery must be activated before the first use and must be checked periodically.

Dry construction, no maintenance is necessary during a long period of storage.

FEATURES

- Dry charged construction
- Activation before first use
- Periodically maintenance and refilled if necessary
- Upright installation only
- 6V and 12V batteries
- Regular life duration
- Unlimited shelf life

TERMINAL

Front



Side



Top



3D



FULBAT[®]

MOTORCYCLE BATTERY

SPECIFICATIONS

Voltage

12V

Capacity

14.7Ah (20hr)
14.0Ah (10hr)

CCA (EN)

175A

DIMENSIONS & WEIGHT

Length

134±2mm

Width


89±2mm

Total Height

166±2mm

Gross weight


4.43kg

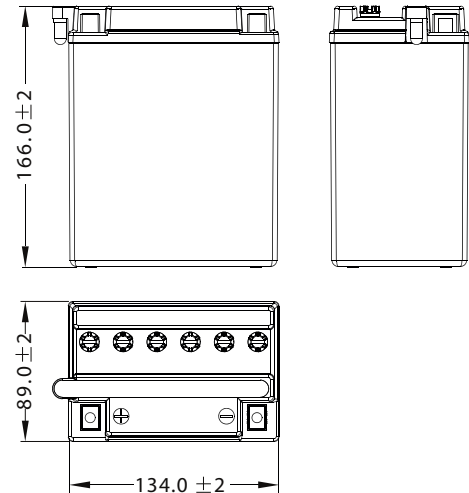

POLARITY



MOUNTING ANGLES



APPLICATIONS



Lawn & garden