



French based company, Fulbat is a leading force in the battery business, present in both replacement and OEM markets. Founded in 2005, we are constantly developing, manufacturing, marketing and selling lead-acid batteries, as well as lithium batteries and battery chargers.


With our technical knowledges and experience, we are able to design new innovative battery solutions to meet the current customers' expectations. We offer an exhaustive program of Starter batteries, Industrial batteries and Motive Power batteries, covering a full range of application. Our Motive Power Battery range is designed to cover Deep Cycle applications.

Fulbat batteries and chargers are widely distributed on all continents through a strong distributor's network, and are very well recognized as qualitative, performing and reliable products.

Manufactured according to the most innovative production processes, Fulbat products are certified by ISO 9001, ISO 14001 and TS 16949.

WORLDWIDE PRESENCE

Head Office

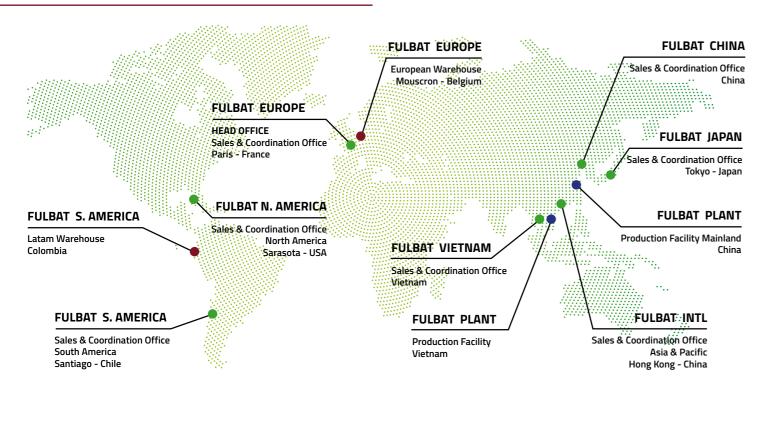

Whether for industrial or leisure use, Fulbat Motive Power offers a complete battery solution for small traction applications that require power and high resistance to deep discharge.

Including Flooded (with maintenance), AGM Carbon (non-spillable and maintenance free) and Lithium (maintenance free), Fulbat Deep Cycle range is ideal for applications such as golf carts, aerial work platforms, cleaning machines, marine. leisure and electric vehicles.

APPLICATIONS

Fulbat Motive Power Battery covers the wide majority of golf carts, cleaning machines, aerial work platforms, leisure and marine applications.













Plant

Warehouse



FDC Series are Deep Cycle liquid electrolyte batteries specifically designed for small traction applications (requiring deep discharges).

With robust design made of thick positive & negative grid plates in a special alloy, the FDC Series offer low self-discharge and ensure a long service life with high resistance to cycles.

FLOODED RANGE High performance & resistance

| | | Designation | P/N | Box size | Voltage (V) | Capacity Ah (20Hr) | Capacity Ah | (capacity minutes) | | (±2mm) | | | | Dolarity | Toyminal |
|--|--|-------------|--------|-------------|----------------|-----------------------|-------------|--------------------|---------------|--------|-----|-----|-----------------|--------------|----------|
| SENERAL INFORMATIONS | | | | | | | | @25A (min) | @75A (min) | L | w | н | Total height | Polarity Ter | Terminai |
| Tochnology, flooded load acid | STATE OF THE PARTY | FDC-605 | 593001 | GC2 | 6 | 210 | 175 | 383 | 105 | 259 | 179 | 245 | 276 | - + | EHPT |
| Technology: flooded lead acid Available voltages: 6V, 8V, 12V | FULBAI/ | FDC-105 | 593002 | GC2 | 6 | 225 | 185 | 447 | 115 | 259 | 179 | 245 | 276 | - + | EHPT |
| Capacities from 150Ah to 260Ah | FDC-875 | FDC-125 | 593003 | GC2 | 6 | 240 | 195 | 488 | 132 | 259 | 179 | 245 | 276 | - + | EHPT |
| Cycle life: | 100310 | FDC-305 | 593037 | 902 | 6 | 330 | 271 | 711 | 195 | 296 | 176 | 343 | 366 | - + | DUAL |
| Cycle life. | DEEP CYCLE SERIES - 145AA AM | FDC-L16 | 593036 | 903 | 6 | 420 | 344 | 850 | 220 | 296 | 176 | 402 | 425 | - | DUAL |

FDC-875

FDC-1275

Watering kits available for GC2, GC8 and GC12 batteries - p.10

GE

- - Up to 800 cycles at 80% DOD* (50% capacity @20°C)
 - Up to 1100 cycles at 50% DOD* (50% capacity @20°C)

*Depth Of Discharge



- ♣ Good deep discharge resilience performance
- ♣ Low self-discharge
- ♣ Low maintenance
- ♣ Polypropylene case material = shock-resistant & acid-resistant
- ◆ Terminals with special lead alloy designed for high vibration resistance.
- ♣ Reinforced grid plates for optimal cyclic use
- ◆ Negative plate: 99.9% pure lead with hard paste feature, specific additives for deep cycle purpose
- ✓ Very good charging efficiency
- ♣ Lower water consumption and reduced thermal runaway possibilities
- ♣ Good performance under critical ambient temperature conditions

APPLICATIONS









TERMINAL CONFIGURATIONS

GC12

593005

593007



- ✓ Terminal height: 38mm
- √ Torque values: 11 - 12nm

170

150

12

120

Bolt terminal:




280

Bolt terminal:

262 181 245

329 181 245 276

CYCLE LIFE

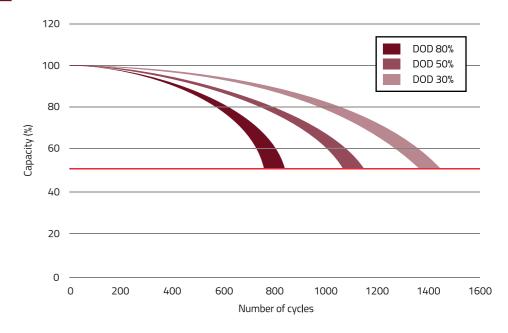



AGM CARBON RANGE Non-spillable & maintenance free

FDC AGM Carbon Series are Deep Cycle batteries, maintenance free and non-spillable, specifically designed for frequent discharge deep cycle applications. With strong industrial design, FDC AGM Carbon Series are robust and ensure a maximum service life with high resistance to cycles and also low self-discharge. The carbon additive makes them perform at a high level in case of partial state of charge (PSOC).

AGM CARBON RANGE

Non-spillable & maintenance free



GENERAL INFORMATIONS

- ♣ Available voltages: 6V, 8V, 12V
- - Up to 750 cycles at 80% DOD* (50% capacity @20°C)
 - Up to 1400 cycles at 50% DOD* (50% capacity @20°C)

*Depth Of Discharge







FEATURES

- ♣ Non-spillable & maintenance free
- ♣ No acid handling
- ◆ Deep cycle design for high capacity and maximum life
- ♣ Reinforced grid/plates design for optimal cyclic use
- Carbon additives to perform in partial state of charge (PSOC) and to increase charging efficiency
- ♣ No stratification phenomenon
- ♣ Robust, safe & reliable
- ♣ Low self-discharge rate for longer shelf life

APPLICATIONS















| Designation | P/N | Вох | Voltage | Capacity | Capacity | (capacity minutes) | | (±2mm) | | | | Polarity | Terminal |
|-------------|--------|------|---------|-----------|----------|--------------------|---------------|--------|-------|-------|-----------------|------------|----------|
| Designation | P/N | size | (V) | Ah (20Hr) | Ah (5Hr) | @25A (min) | @75A (min) | L W | | н | Total height | Polarity | Terminai |
| FDC6-225 | 593019 | GC2 | 6 | 225 | 192 | 490 | 135 | 259 | 180 | 247 | 253 | - + | T11 |
| FDC6-245 | 593010 | - | 6 | 245 | 210 | 530 | 145 | 243 | 187.5 | 275 | 275 | _ | T11 |
| FDC6-265 | 593027 | GC2 | 6 | 268 | 230 | 620 | 165 | 262 | 180 | 263 | 268 | - + | T11 |
| FDC6-350 | 593011 | 902 | 6 | 350 | 305 | 820 | 240 | 295 | 180 | 346 | 368 | - + | DUAL |
| FDC6-400 | 593012 | 903 | 6 | 400 | 342 | 925 | 265 | 295 | 180 | 406 | 428 | - + | DUAL |
| FDC8-170 | 593026 | GC8 | 8 | 170 | 145 | 325 | - | 260 | 180 | 252 | 274 | + - | DUAL |
| FDC12-14 | 593022 | - | 12 | 15 | 13.5 | - | - | 151.5 | 99.5 | 95.5 | 98.2 | <u>+</u> | T12 |
| FDC12-24 | 593013 | - | 12 | 25 | 22.6 | - | - | 181.5 | 77 | 170 | 170 | - + | T12 |
| FDC12-39 | 593030 | - | 12 | 39 | 35 | - | - | 195 | 130 | 167 | 167 | + - | T6 |
| FDC12-43 | 593031 | - | 12 | 43 | 34 | - | - | 267.5 | 77.5 | 171 | 171 | - + | T12 |
| FDC12-46 | 593020 | - | 12 | 53 | 44 | - | - | 197 | 166 | 170 | 170 | - + | T6 |
| FDC12-55 | 593033 | - | 12 | 55 | 48 | - | - | 223 | 123 | 172 | 175 | - | T6 |
| FDC12-60 | 593025 | - | 12 | 68 | 57 | - | - | 229 | 138 | 216.5 | | - + | T6 |
| FDC12-75 | 593021 | - | 12 | 82 | 71 | 160 | - | 260 | 168 | 208 | 214 | + - | T6 |
| FDC12-90 | 593014 | 24 | 12 | 90 | 77 | 175 | 43 | 260 | 168 | 208 | 232.5 | + - | DUAL |
| FDC12-90 | 593029 | 24 | 12 | 90 | 77 | 175 | 43 | 260 | 168 | 208 | 214 | + - | T11 |
| FDC12-105 | 593018 | 27 | 12 | 108 | 96 | 220 | 55 | 306 | 168 | 208 | 232.5 | + - | DUAL |
| FDC12-105 | 593023 | 27 | 12 | 108 | 96 | 220 | 55 | 306 | 168 | 208 | 214 | + - | T11 |
| FDC12-115 | 593015 | 31 | 12 | 118 | 107 | 239 | 65 | 330 | 173 | 212 | 220 | + - | T11 |
| FDC12-145 | 593016 | - | 12 | 148 | 122 | 308 | 88 | 340 | 172 | 280 | 286 | + - | T11 |
| FDC12-150 | 593017 | GC12 | 12 | 150 | 136 | 323 | 90 | 327 | 180 | 274 | 274 | <u>+ -</u> | T11 |
| FDC12-180 | 593028 | - | 12 | 180 | 162 | 395 | 108 | 483 | 170 | 238,5 | 238,5 | + - | T11 |


TERMINAL CONFIGURATIONS
















CYCLE LIFE

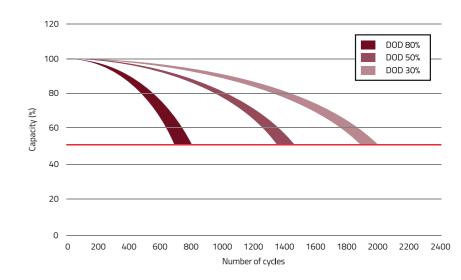









FDC Lithium Series are LiFeP04 batteries, that offer exceptional performance. Including an intelligent built-in Battery Management System (BMS) & CANbus connection to monitor the battery's status, these LiFePO4 batteries provide an extra layer of protection, ensuring prolonged battery life. FDC Deep Cycle Lithium Series is designed to be a long-lasting, maintenance-free, lightweight and dropin replacement option for Lead Acid batteries.



GENERAL INFORMATIONS

- ♣ Technology: LiFePO4
- ♣ Voltage: 51.2V
- - Up to 6000 cycles at 80% DOD* (50% capacity @20°C)
 - Up to 7500 cycles at 50% DOD* (50% capacity @20°C)

*Depth Of Discharge







FEATURES

- ✓ Smart BMS (Battery Management System) self-protects against short circuits, overheating, overcharge, overdischarge and over-current
- ♣ Fast charge: under 4 hours
- ♣ 2-3X the lifetime of flooded lead acid batteries
- ♣ Acid-free design takes away corrosion, acid drips and charging fumes

- ♣ On/Off button to turn the battery off for maintenance or long-term
- ♣ Up to 10 parallel connections

APPLICATIONS











TERMINAL CONFIGURATIONS




CYCLE LIFE

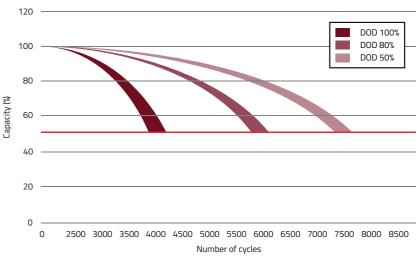

9

BATTERY DESIGN

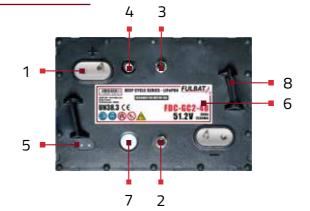

- 1. Dual M8 Terminal
- 2. Communication port 1
- Communication port 2
- 4. Pressure relief valve
- 5. LED indicators
- 6. Heatsink
- 7. Power button
- 8. Lifting brackets









WATERING KITS

This watering kit simplifies the upkeep of flooded batteries and ensures they are filled to the ideal water level! By automating the watering process, this system boosts efficiency, safety, and battery longevity. These advantages translate into both time and cost savings!



| Designation | Watering kit 24V (4x6V) | Watering kit 36V (6x6V) | Watering kit 48V (8x6V) | Watering kit 48V (6x8V) | Watering kit 48V (4x12V) | | | | |
|---------------------------|--|----------------------------|----------------------------|---------------------------------|-----------------------------|--|--|--|--|
| P/N | 750556 | 750557 | 750558 | 750559 | 750560 | | | | |
| System voltage (V) | 24V | 36V | 48V | 48V | 48V | | | | |
| Battery voltage (V) | 6V | 6V | 6V | 8V | 12V | | | | |
| Premounted plugs | x4pcs | хбрсѕ | x8pcs | x6pcs | x4pcs | | | | |
| End stppers | End stoppers to be placed on a 6mm tube or on an all-in-one male connector. x2pcs | | | | | | | | |
| All-in-one couple male | A decompression valve for the system activates when the fills the batteries under pressure exceeding 1 bar. An integrated filter can be cleaned by simply pressing on t valve inlet (when the connection still contains water). A flow indicator (yellow balls rotating around the filter) due battery filling. Two outlets for 6mm hose, enabling closed-loop mounting the filling circuit on the battery. | | | | | | | | |
| PVC tube | | x1pc | | ter: 6mm ess: 1.5mm :: 3m | | | | | |





Visit our website for more information www.fulbat.com



DISCOVER FULBAT RANGES







FULBAT MOTIVE POWER BATTERY

Release 2025.03







