

# FPC12-35

## Datasheet

# FULBAT®

INDUSTRIAL BATTERY




FPC Series are deep cycle batteries specially designed for long duration cyclic applications, ie with use in charge and then intensive discharge. With advanced AGM valve regulated technology and oversized negative plates, the FPC Series ensure very good cyclic performance with greater depth of discharge for mobility-type applications such as medical, golf and also renewable energies storage.


In harsh use conditions (high temperature, higher deep of discharge...), the Gel FPG range is recommended.

### DIMENSIONS & WEIGHT

<b>Length</b>	195±2mm
<b>Width</b>	130±2mm
<b>Total height</b>	168±2mm
<b>Gross weight</b>	9.6kg

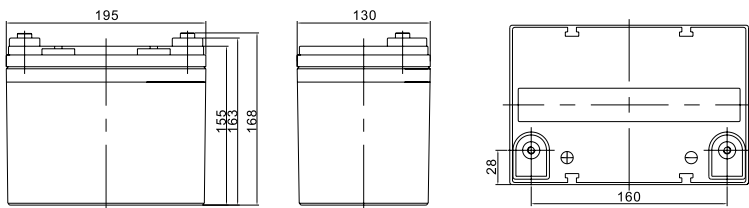

### TERMINAL




### SPECIFICATIONS

<b>Nominal voltage</b>	12V (6 cells)
<b>Nominal capacity</b>	33.0Ah (20hr)
<b>Cycle life</b>	
(50% capacity @20°C)	Up to 350 cycles at 100% DOD
(50% capacity @20°C)	Up to 800 cycles at 50% DOD
<b>Internal resistance</b>	Approx 12mΩ
<b>Terminal</b>	T5
<b>Max. discharge current</b>	330A (5 sec)
<b>Reference capacity</b>	33.0Ah (20hr, 1.75V/cell, 25°C) 31.4Ah (10hr, 1.75V/cell, 25°C) 28.1Ah (5hr, 1.75V/cell, 25°C) 24.8Ah (3hr, 1.75V/cell, 25°C)
<b>Charge voltage</b>	
Standby use voltage	13.6V ~ 13.8V 25°C Temperature compensation: -3mV/°C/Cell
Cycle use voltage	14.6V ~ 14.8V 25°C Temperature compensation: -4mV/°C/Cell
<b>Operating temp. range</b>	Discharge: -20°C ~ 60°C Charge: 0°C ~ 50°C Storage: -20°C ~ 60°C
<b>Nominal operating temp. range</b>	25°C ± 3°C
<b>Self discharge</b>	Can be stored for up to 6 months at 25°C and then recharging is recommended. Monthly self-discharge ratio is less than 3% at 25°C
<b>Capacity affected by temp.</b>	40°C 103% 25°C 100% 0°C 86%
<b>Container material</b>	A.B.S. UL94-HB   UL94-V0 optional

### APPROVALS

ISO9001 - Quality management system  
ISO14001 - Environmental management System  
Approved for transport by Air (IATA)  
Designed in accordance with IEC 60896-21/22

### APPLICATIONS



Renewable energy



Medical



Mobility



Golf caddy



Leisure & Marine

# FPC12-35

## Datasheet




### CONSTANT CURRENT DISCHARGE (A) @25°C

F.V/Time	10min	15min	30min	1h	2h	3h	4h	5h	8h	10h	20h
1.60V/cell	83.8	63.0	36.9	20.2	12.0	9.31	7.31	6.22	4.09	3.31	1.72
1.65V/cell	79.2	60.2	35.4	19.5	11.6	9.02	7.12	6.06	4.05	3.27	1.69
1.70V/cell	72.9	56.4	33.8	18.8	11.2	8.77	6.92	5.91	3.98	3.22	1.67
1.75V/cell	66.7	52.5	32.3	18.1	10.8	8.51	6.75	5.76	3.93	3.18	1.65
1.80V/cell	60.4	48.5	30.9	17.5	10.4	8.25	6.55	5.61	3.86	3.14	1.63
1.85V/cell	49.3	40.2	26.6	15.7	9.54	7.63	6.09	5.23	3.62	2.95	1.55


### CONSTANT POWER DISCHARGE (W/CELL) @25°C

F.V/Time	10min	15min	30min	1h	2h	3h	4h	5h	8h	10h	20h
1.60V/cell	142.4	110.2	67.0	37.9	22.7	17.8	14.0	12.0	7.99	6.50	3.38
1.65V/cell	137.1	106.9	64.9	36.8	22.0	17.3	13.7	13.7	7.92	6.43	3.33
1.70V/cell	128.6	101.6	62.7	35.8	21.4	16.9	13.4	13.4	7.81	6.34	3.30
1.75V/cell	119.8	95.9	60.5	34.7	20.8	16.5	13.1	13.1	7.72	6.27	3.26
1.80V/cell	110.3	89.8	58.5	33.6	20.1	16.0	12.8	12.8	7.61	6.19	3.26
1.85V/cell	91.8	75.6	50.8	30.3	18.6	14.9	11.9	11.9	7.16	5.84	3.07


### DISCHARGE CHARACTERISTICS

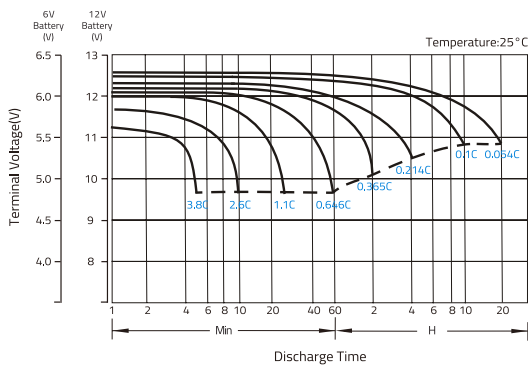


### FLOAT CHARGING CHARACTERISTICS

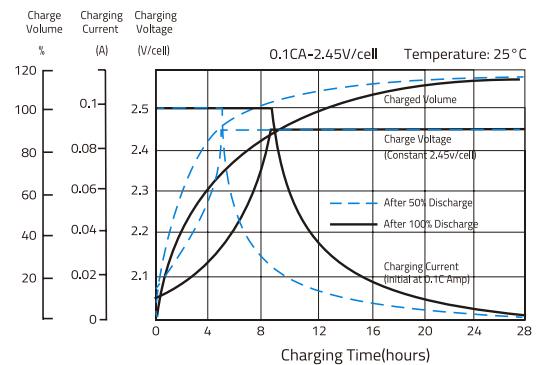


### TEMPERATURE IN RELATION TO BATTERY CAPACITY

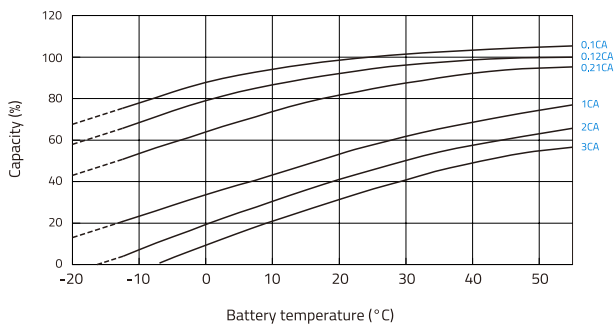

### CYCLE LIFE IN RELATION TO DEPTH OF DISCHARGE

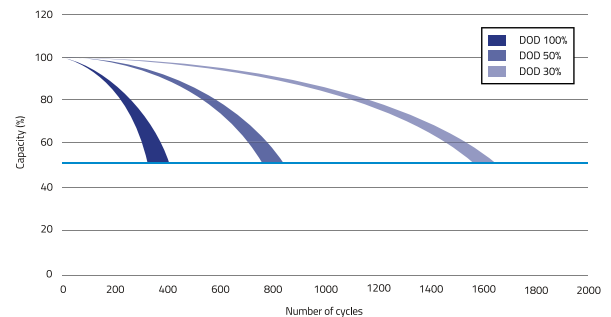

### SELF DISCHARGE CHARACTERISTICS

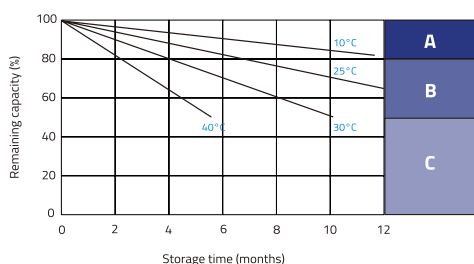

**A** No supplementary charge required  
(Carry out supplementary charge before use if 100% capacity is required.)

Supplementary charge required before use. Optional charging way as below:

- B**
- Charged for above 3 days at limited current 0.25CA and constant voltage 2.25V/cell.
  - Charged for above 20hours at limited current 0.25CA and constant voltage 2.45V/cell.
  - Charged for 8~10hours at limited current 0.05CA .

**C** Supplementary charge may often fail to recover the capacity.  
The battery should never be left standing till this is reached.