

FLTK01

Datasheet



LiFePO4

NON-SPILLABLE

The Lithium range is designed to offer the ultimate riding experience.

Ready to use and with ultra-light weight conception, this LiFePO4 range will ensure extreme starting performance, very low self-discharge and extreme cycle life. Thanks to the Battery Management System integrated, these batteries offer a very safe solution, ideal for the most demanding riders.

FEATURES

- » Ready to use & Maintenance Free
- » Ultra lightweight compare to Lead-acid battery
- » Very high cold cranking performance
- » Ultra safe thanks to the integrated BMS
- » Very fast recharge
- » Multi-positional fitment
- » Very low self-discharge

BATTERY REPLACEMENT

- » KTM OE replacement

TERMINAL

Front



Side



Top



3D




SPECIFICATIONS


Voltage	Capacity	CCA (EN)
12.8V	2.0Ah	140A
Energy	Charging current std.	Charging current max
25.6Wh	1.0A	2.0A

DIMENSIONS & WEIGHT


Length	86±2mm
Width	48±2mm
Total Height	90±2mm
Gross weight	0.36kg

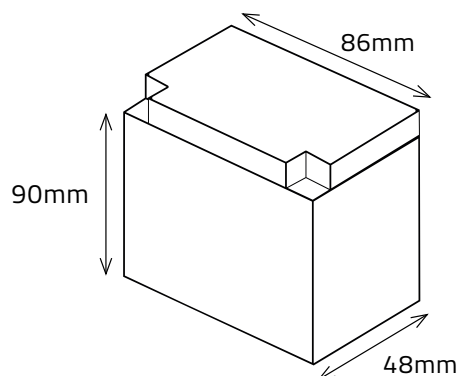

POLARITY



MOUNTING ANGLES



APPLICATIONS



Motorcycle



Scooter



ATV



SSV & UTV



Snowmobile



Watercraft