


DRY RANGE

Easy to store

The Dry battery range offers an incomparable choice of 6V and 12V models. Delivered with an acid pack, the DRY battery must be activated before the first use and must be checked periodically. DRY construction, no maintenance is necessary during a long period of storage.


FEATURES

- ✓ DRY charged construction
- ✓ Activation before first use
- ✓ Periodically maintenance & refilled if necessary
- ✓ Upright installation only
- ✓ 6V & 12V batteries
- ✓ Regular life duration
- ✓ Unlimited shelf life

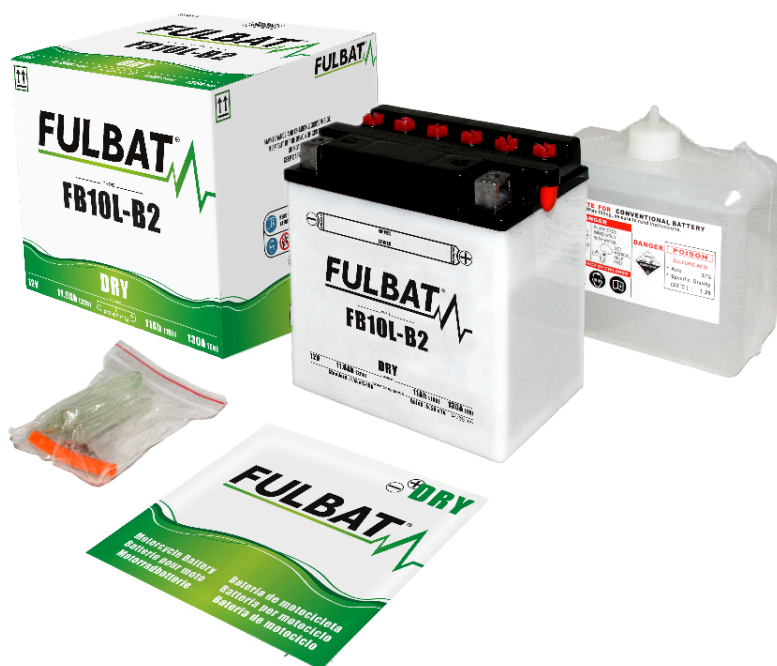

COMPATIBLE CHARGERS

- ✓ Fulload 1000
- ✓ Fulbank 2000
- ✓ Fulload F4



Fulbat designation	Voltage (V)	Capacity Ah (10h)	Capacity Ah (20h)	CCA A (-18°C)	Dimensions (±2mm)			Assembly drawing	Terminal 3D
					L	W	H		
6N4-2A	6	4	4.2	25	71	71	96		-
6N4-2A-4	6	4	4.2	25	71	71	96		-
6N4B-2A	6	4	4.2	35	102	48	96		-
6N6-3B	6	6	6.3	50	99	57	111		
6N6-3B-1	6	6	6.3	50	99	57	111		
6N11A-1B	6	11	11.6	90	122	62	131		
6N11A-3A	6	11	11.6	90	122	62	131		
B39-6	6	7	7.4	60	126	48	126		
B49-6	6	8	8.4	80	91	83	160		
B38-6A	6	13	13.7	105	119	83	161		
12N5.5-3B	12	5.5	5.8	55	135	60	130		
12N5.5-4A	12	5.5	5.8	55	135	60	130		
FB3L-A	12	3	3.2	32	98	56	110		

Fulbat designation	Voltage (V)	Capacity Ah (10h)	Capacity Ah (20h)	CCA A (-18°C)	Dimensions (±2mm)			Assembly drawing	Terminal 3D
					L	W	H		
FB3L-B	12	3	3.2	32	98	56	110		
FB4L-B	12	4	4.2	56	120	70	92		
FB5L-B (12N5-3B)	12	5	5.3	65	120	60	130		
FB7L-B2 (12N7-3B)	12	8	8.4	85	135	75	133		
FB7-A (12N7-4A)	12	8	8.4	105	135	75	133		
FB7C-A	12	8	8.4	85	130	90	114		
FB9-B (12N9-4B-1)	12	9	9.5	115	135	75	139		
FB9L-B (12N9-3B)	12	9	9.5	115	135	75	139		
FB10L-A2	12	11	11.6	130	135	90	145		
FB10L-B2	12	11	11.6	130	135	90	145		
FB10L-BP (FB10L-B)	12	11	11.6	165	135	90	145		
FB12A-A (12N12A-4A-1)	12	12	12.6	155	134	80	160		
FB12AL-A/A2	12	12	12.6	155	134	80	160		
FB12A-B	12	12	12.6	155	134	80	160		
FB12C-A	12	12	12.6	155	134	80	175		
FB14-A2 (12N14-4A)	12	14	14.7	175	134	89	166		
FB14L-A2 (12N14-3A)	12	14	14.7	175	134	89	166		
FB14L-B2	12	14	14.7	175	134	89	166		
FB14A-A2	12	14	14.7	175	134	89	176		
FB16B-A1	12	16	16.8	210	160	90	161		
FB16AL-A2	12	16	16.8	210	207	71	164		
FB16CL-B	12	19	20.0	240	175	100	175		
FB30L-B	12	30	31.6	300	165	130	176		
FB30CL-B	12	30	31.6	300	165	130	192		
F50-N18L-A /12N18-3A	12	20	21.1	260	205	90	162		
F50-N18L-A3	12	20	21.1	260	205	90	162		
51814	12	-	19	210	186	82	171		
51913	12	-	19	210	186	82	171		
53030 (F60-N30L-A)	12	-	30	300	186	130	171		
53034 (F60-N30-A)	12	-	30	300	186	130	171		



UPGRADE CROSS REFERENCE CHART

DRY	MF	GEL	LITHIUM
6N4-2A ; 6N4-2A-4		6N4-2A/A-4 GEL	
6N6-3B ; 6N6-3B-1		6N6-3B/B-1 GEL	
B49-6		B49-6 GEL	
B38-6A		B38-6A GEL	
6N11A-1B ; 6N11A-3A		6N11A-1B/3A GEL	
12N5.5-3B		12N5.5-3B GEL	
12N5.5-4A		12N5.5-4A GEL	
FB3L-A ; FB3L-B		FB3L-A/B GEL	
FB4L-B		FB4L-B GEL	FLTX4L/5L / FLTZ5S/6S
FB5L-B ; 12N5-3B		FB5L-B GEL	
12N7-4A ; FB7-A		FB7-A GEL	
FB7C-A		FB7C-A GEL	
FB7L-B ; FB7L-B2 ; 12N7-3B		FB7L-B/B2 GEL	FLTX7L/FLTZ7S
FB9-B ; 12N9-4B1	FT9A-BS	FB9-B GEL	
FB10L-A2 ; FB10L-B2 ; 12N10-3A/B		FB10L-A2/B2 GEL	
FB12AL-A ; FB12AL-A2		FB12AL-A2 GEL	
FB12A-A ; FB12A-B ; 12N12A-4A-1		FB12A-A/B GEL	
FB14A-A1 ; FB14A-A2		FB14A-A2 GEL	
FB16AL-A2		FB16AL-A2 GEL	
FB16CL-B		FB16CL-B GEL	FLTX20HL
	FT4B-BS	FT4B-BS GEL	
	FTR4A-BS	FTR4A-BS GEL	
	FTX4L-BS/FTZ5S	FTX4L-BS/FTZ5S GEL	FLTX4L/5L / FLTZ5S/6S
	FTX5L-BS	FTX5L-BS/FTZ6S GEL	FLTX4L/5L / FLTZ5S/6S
	FTX7A-BS	FTX7A-BS GEL	FLTX7A/9/12/14 / FLTZ10S/12S/14S
	FTX7L-BS	FTX7L-BS GEL	FLTX7L / FLTZ7S
	FTX9-BS	FTX9-BS GEL	FLTX7A/9/12/14 / FLTZ10S/12S/14S
	FT12A-BS	FT12A-BS GEL	FLTX7A/9/12/14 / FLTZ10S/12S/14S
	FTX12-BS	FTX12-BS GEL	FLTX7A/9/12/14 / FLTZ10S/12S/14S
	FTX14-BS	FTX14-BS GEL	FLTX7A/9/12/14 / FLTZ10S/12S/14S
	FTX14L-BS	FTX14L-BS GEL ; FHD14HL-BS GEL	
FB14-A2 ; FB14-B2 ; 12N14-4A	FTX14AH-BS	FTX14AH-BS/FB14-A2 GEL	
FB14L-A2 ; FB14L-B2 ; 12N14-3A	FTX14AHL-BS	FTX14AHL-BS/FB14L-A2 GEL	
	FTX16-BS	FTX16 GEL	
	FTX20-BS	FTX20-BS GEL	FLTX20H
	FTX20A-BS	FTX20A-BS GEL	
FB16L-B ; FB18L-A	FTX20L-BS	FTX20HL-BS GEL ; FHD20HL-BS GEL	FLTX20HL
12N18-3A ; F50-N18L-A ; F50-N18L-A3	FTX24HL-BS	FTX24HL-BS/F50-N18L-A/A2/A3 GEL	
FB30L-B	FIX30L-BS	FIX30L-BS GEL ; FHD30HL-BS GEL	
		FTZ7V	FLTX7L / FLTZ7S
		FTZ7S GEL ; FTZ8V GEL	FLTX7L / FLTZ7S
		FT7B-4 GEL	FLT7B/9B
		FT9B-4 GEL	FLT7B/9B
		FTZ10S GEL	FLTX7A/9/12/14 / FLTZ10S/12S/14S
		FTZ12S GEL	FLTX7A/9/12/14 / FLTZ10S/12S/14S
		FT12B-4 GEL	FLT12B/14B
		FTZ14S GEL	FLTX7A/9/12/14 / FLTZ10S/12S/14S
		FT14B-4 GEL	FLT12B/14B
51814 ; 51913		NH12-20 GEL	
53030 ; F60-N30L-A		53030 GEL	FLTX30HL
53034 ; F60-N30-A		53034 GEL	

LITHIUM

Ready to use
High CCA performance
Ultra lightweight




GEL

Ready to use
100% maintenance free
Non-spillable



MF

100% maintenance free
Higher cycle life
Unlimited shelf life

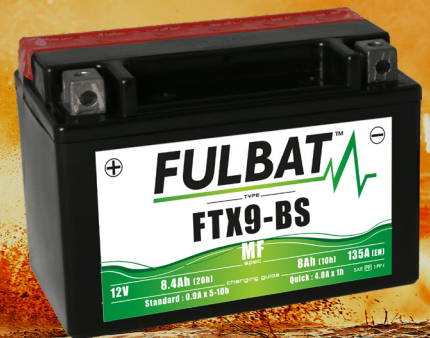

DRY

DRY charged construction
6 & 12V batteries
Unlimited shelf life

