

FP12-18FR

Datasheet




NON-SPILLABLE

AGM


FP Series are general purpose batteries with 5 years design life in float service. With advanced AGM valve regulated technology and high purity raw material, the FP series batteries ensure high performance and reliable standby service life. They have been designed specifically for applications such as security & alarm systems, UPS, Telecom, power grid, medical equipment and emergency lighting. It can also be used for light cycling use. For intensive cycling, the FPC or FPG cyclic ranges are recommended.

DIMENSIONS & WEIGHT

Length	181.5±2mm
Width	76.5±2mm
Total height	167.5±2mm
Gross weight	5.4kg

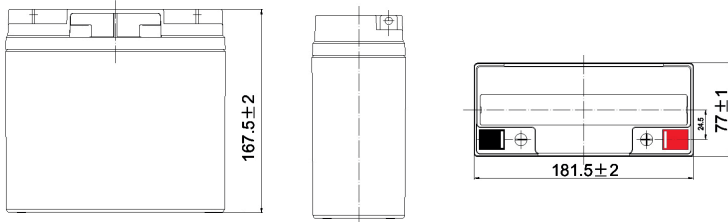

TERMINAL



SPECIFICATIONS

Nominal voltage	12V (6 cells)
Nominal capacity	18.0Ah (20hr)
Design life	5 years at 25°C
Internal resistance	Approx 16mΩ
Terminal	T12
Max. discharge current	270.0A (5 sec)
Reference capacity	18.0Ah (20hr, 1.75V/cell, 25°C) 17.0Ah (10hr, 1.75V/cell, 25°C) 15.5Ah (5hr, 1.75V/cell, 25°C) 13.8Ah (3hr, 1.75V/cell, 25°C) 11.8Ah (1hr, 1.60V/cell, 25°C)

Charge voltage	13.5V ~ 13.8V 25°C
Standby use voltage	Temperature compensation: -10mV/°C/Cell

Cycle use voltage	14.4V ~15.0V 25°C
	Temperature compensation: -15mV/°C/Cell

Operating temp. range	Discharge: -15°C ~ 50°C Charge: -20°C ~ 40°C Storage: -15°C ~ 40°C
------------------------------	--

Nominal operating temp. range	25°C ± 3°C
--------------------------------------	------------

Self discharge	Can be stored for up to 6 months at 25°C and then recharging is recommended. Monthly self-discharge ratio is less than 3% at 25°C
-----------------------	---

Capacity affected by temp.	40°C 103%
	25°C 100%
	0°C 86%

Container material	Flame Retardant UL94-V0
---------------------------	-------------------------

APPROVALS

ISO9001 - Quality management system
ISO14001 - Environmental management System
Approved for transport by Air (IATA)
Designed in accordance with IEC 60896-21/22

APPLICATIONS



Emergency & security



Medical



UPS & data center



Telecom

FP12-18FR

Datasheet




CONSTANT CURRENT DISCHARGE (A) @25°C

F.V./Time	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	37.5	29.2	24.0	17.9	13.1	10.7	6.16	4.45	3.54	3.02	2.58	2.03	1.66	0.880
1.80V/cell	39.8	30.6	25.0	18.4	13.4	11.0	6.28	4.52	3.59	3.06	2.62	2.06	1.69	0.890
1.75V/cell	41.4	31.7	25.7	18.9	13.7	11.2	6.39	4.59	3.64	3.10	2.65	2.09	1.70	0.900
1.70V/cell	43.0	32.7	26.4	19.4	14.0	11.4	6.48	4.66	3.69	3.14	2.68	2.11	1.72	0.907
1.67V/cell	44.2	33.5	27.0	19.7	14.2	11.6	6.56	4.70	3.73	3.17	2.71	2.12	1.73	0.914
1.60V/cell	46.1	34.7	27.8	20.3	14.6	11.8	6.69	4.79	3.79	3.22	2.75	2.15	1.75	0.924


CONSTANT POWER DISCHARGE (W/CELL) @25°C

F.V./Time	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	71.4	55.9	46.3	34.6	25.4	20.8	12.1	8.74	6.98	5.95	5.11	4.03	3.31	1.76
1.80V/cell	75.2	58.3	47.9	35.5	25.9	21.3	12.3	8.87	7.07	6.03	5.18	4.09	3.35	1.78
1.75V/cell	77.6	59.9	48.9	36.2	26.4	21.6	12.4	8.98	7.16	6.10	5.23	4.13	3.38	1.80
1.70V/cell	80.2	61.5	50.1	37.0	26.9	21.9	12.6	9.10	7.24	6.17	5.29	4.17	3.41	1.81
1.67V/cell	82.0	62.8	51.0	37.5	27.3	22.2	12.7	9.18	7.30	6.22	5.33	4.20	3.43	1.83
1.60V/cell	84.4	64.5	52.3	38.4	27.8	22.6	12.9	9.32	7.41	6.30	5.40	4.25	3.47	1.85


DISCHARGE CHARACTERISTICS

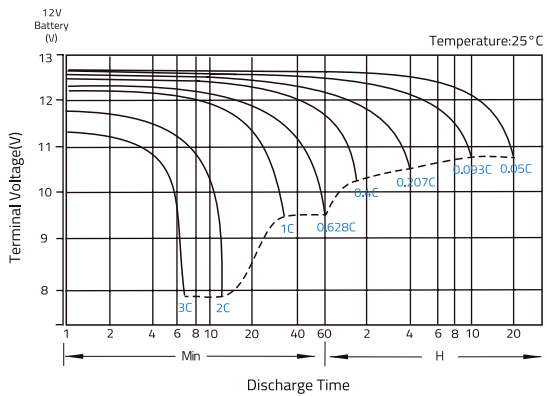

FLOAT CHARGING CHARACTERISTICS

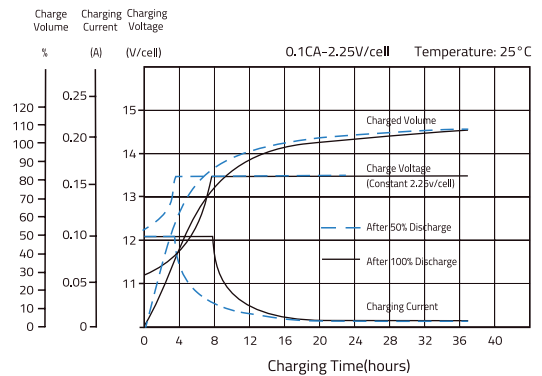

TEMPERATURE IN RELATION TO BATTERY CAPACITY

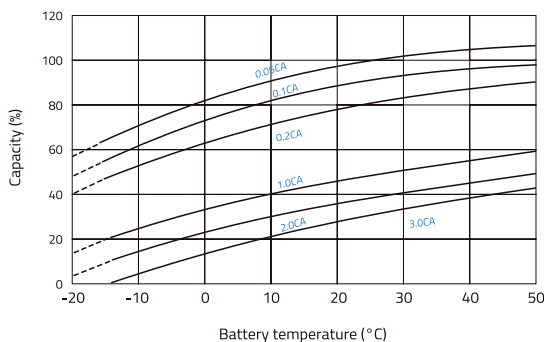

TEMPERATURE ON LONG TERM FLOAT LIFE

