

FPG12-100

Datasheet

FULBAT®


CYCLIC BATTERY




FPG Series are deep cycle batteries specially designed for long duration cyclic applications, ie with use in charge and then intensive discharge. With innovative GEL valve regulated technology and special plate design, the FPG Series ensure higher cyclic performance and higher recovery capability after deep discharge than cyclic AGM batteries. This range is ideal for applications such as mobility, golf, marine & leisure and renewable energies storage.

DIMENSIONS & WEIGHT

Length	330±2mm
Width	173±2mm
Total height	218±2mm
Gross weight	31.2kg

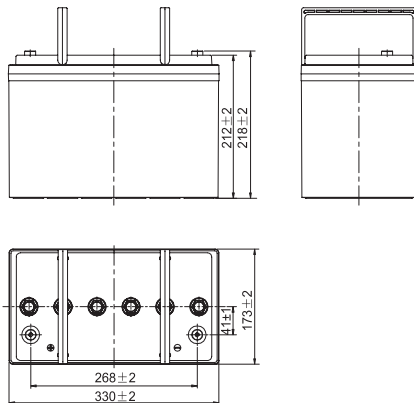

TERMINAL



SPECIFICATIONS

Nominal voltage	12V (6 cells)
Nominal capacity	100.0Ah (20hr)
Cycle life	(50% capacity @20°C) Up to 550 cycles at 100% DOD (50% capacity @20°C) Up to 1100 cycles at 50% DOD
Internal resistance	Approx 6.9mΩ
Terminal	T11
Max. discharge current	1000A (5 sec)
Reference capacity	100.0Ah (20hr, 1.80V/cell, 25°C) 90.0Ah (10hr, 1.80V/cell, 25°C) 79.5Ah (5hr, 1.75V/cell, 25°C) 71.1Ah (3hr, 1.75V/cell, 25°C) 57.0Ah (1hr, 1.60V/cell, 25°C)
Charge voltage	2.23V ~ 2.27V at 25°C Temperature compensation: -3mV/°C/Cell
Cycle use voltage	2.40V ~ 2.50V at 25°C Temperature compensation: -4mV/°C/Cell
Operating temp. range	Discharge: -20°C ~ 55°C Charge: -20°C ~ 40°C Storage: -15°C ~ 50°C
Nominal operating temp. range	25°C ± 3°C
Self discharge	Can be stored for up to 6 months at 25°C and then recharging is recommended. Monthly self-discharge ratio is less than 3% at 25°C
Capacity affected by temp.	40°C 103% 25°C 100% 0°C 86%
Container material	A.B.S. UL94-HB UL94-V0 optional

APPROVALS

ISO9001 - Quality management system
 ISO14001 - Environmental management System
 Approved for transport by Air (IATA)
 Designed in accordance with IEC 60896-21/22

APPLICATIONS



FPG12-100

Datasheet




CONSTANT CURRENT DISCHARGE (A) @25°C

F.V/Time	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	118.4	102.7	80.8	65.3	52.1	42.3	26.1	20.8	16.9	14.7	12.8	10.4	8.82	4.75
1.80V/cell	134.4	116.4	91.3	75.8	59.2	46.8	28.8	22.8	18.3	15.5	13.6	10.9	9.00	5.00
1.75V/cell	145.8	126.0	98.6	79.2	61.4	52.5	30.9	23.7	18.9	15.9	14.0	11.0	9.27	5.11
1.70V/cell	152.5	132.3	103.7	82.9	63.7	54.2	31.5	24.5	19.3	16.4	14.3	11.2	9.36	5.26
1.67V/cell	160.4	137.7	107.4	85.2	64.9	55.2	32.1	24.8	19.6	16.7	14.5	11.3	9.45	5.30
1.60V/cell	165.9	142.0	110.1	90.4	68.0	57.0	32.8	25.0	19.8	16.8	14.7	11.4	9.51	5.33


CONSTANT POWER DISCHARGE (W/CELL) @25°C

F.V/Time	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	222.8	194.4	153.6	123.2	98.8	82.2	51.1	40.7	33.2	28.9	25.3	20.6	17.5	9.10
1.80V/cell	249.2	217.5	171.8	141.6	111.2	90.4	56.0	44.5	35.9	30.3	26.7	21.4	17.8	9.50
1.75V/cell	266.0	232.1	183.4	146.7	114.6	100.6	59.8	46.1	36.9	31.2	27.5	21.7	18.3	9.80
1.70V/cell	273.4	240.6	190.6	151.9	117.9	102.8	61.3	46.9	37.3	32.0	27.9	22.0	18.4	10.0
1.67V/cell	284.2	248.0	195.9	155.2	119.6	104.5	62.4	47.5	37.8	32.4	28.2	22.1	18.5	10.1
1.60V/cell	288.2	251.5	198.7	162.2	124.2	106.9	62.8	47.7	38.0	32.6	28.4	22.2	18.6	10.1


DISCHARGE CHARACTERISTICS

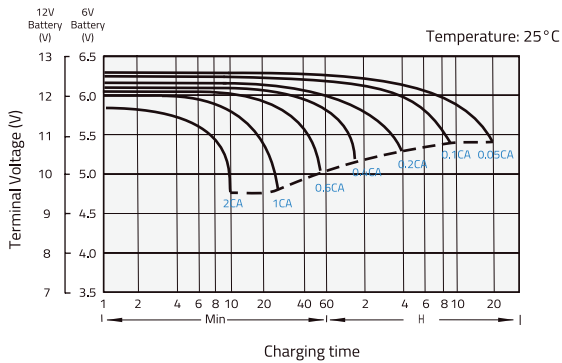

FLOAT CHARGING CHARACTERISTICS

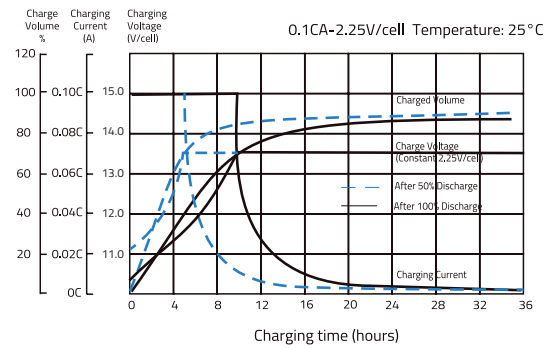

CYCLE LIFE IN RELATION TO DEPTH OF DISCHARGE

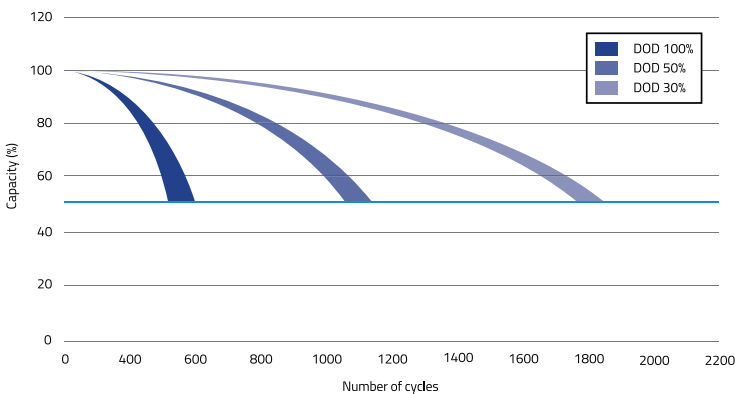

TEMPERATURE ON LONG TERM FLOAT LIFE

