

FP6-7.2

Datasheet

FULBAT™
GENERAL PURPOSE BATTERY




AGM

NON-SPILLABLE


FP Series are general purpose batteries with 5 years design life in float service. With advanced AGM valve regulated technology and high purity raw material, the FP series batteries ensure high performance and reliable standby service life. They have been designed specifically for applications such as security & alarm systems, UPS, Telecom, power grid, medical equipment and emergency lighting. It can also be used for light cycling use. For intensive cycling, the FPC or FPG cyclic ranges are recommended.

DIMENSIONS & WEIGHT

Length	151±2mm
Width	34±2mm
Total height	100±2mm
Gross weight	1.05kg

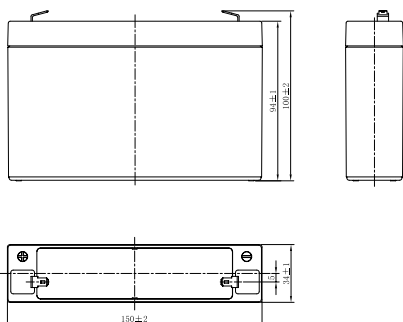

TERMINAL



SPECIFICATIONS

Nominal voltage	6V (3 cells)
Nominal capacity	7.2Ah (20hr)
Design life	5 years at 25°C
Internal resistance	Approx 13mΩ
Terminal	T1
Max. discharge current	108.0A (5 sec)
Reference capacity	7.20Ah (20hr, 1.75V/cell, 25°C) 6.69Ah (10hr, 1.75V/cell, 25°C) 6.20Ah (5hr, 1.75V/cell, 25°C) 5.61Ah (3hr, 1.75V/cell, 25°C) 4.67Ah (1hr, 1.60V/cell, 25°C)

Charge voltage	6.75V ~ 6.9V 25°C
Standby use voltage	Temperature compensation: -3mV/°C/Cell
Cycle use voltage	7.2V ~ 7.5V 25°C Temperature compensation: -5mV/°C/Cell
Operating temp. range	Discharge: -15°C ~ 50°C Charge: -20°C ~ 40°C Storage: -15°C ~ 40°C
Nominal operating temp. range	25°C ± 3°C
Self discharge	Can be stored for up to 6 months at 25°C and then recharging is recommended. Monthly self-discharge ratio is less than 3% at 25°C
Capacity affected by temp.	40°C 103% 25°C 100% 0°C 86%
Container material	A.B.S. UL94-HB UL94-V0 optional

APPROVALS

ISO9001 - Quality management system
ISO14001 - Environmental management System
Approved for transport by Air (IATA)
Designed in accordance with IEC 60896-21/22

APPLICATIONS



Emergency
& security



Medical



UPS &
datacenter

FP6-7.2

Datasheet


CONSTANT CURRENT DISCHARGE (A) @25°C

F.V/Time	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	14.8	11.7	9.58	7.03	5.23	4.28	2.48	1.81	1.43	1.19	1.02	0.799	0.653	0.351
1.80V/cell	15.6	12.2	9.88	7.21	5.34	4.35	2.52	1.84	1.45	1.21	1.03	0.809	0.660	0.355
1.75V/cell	16.3	12.7	10.2	7.38	5.44	4.43	2.56	1.87	1.47	1.22	1.04	0.819	0.669	0.360
1.70V/cell	17.1	13.1	10.5	7.54	5.54	4.51	2.60	1.89	1.49	1.24	1.06	0.829	0.676	0.362
1.65V/cell	17.5	13.4	10.7	7.65	5.61	4.56	2.62	1.91	1.50	1.25	1.07	0.836	0.681	0.365
1.60V/cell	18.6	14.0	11.1	7.88	5.76	4.67	2.68	1.95	1.53	1.27	1.08	0.849	0.692	0.370


CONSTANT POWER DISCHARGE (W/CELL) @25°C

F.V/Time	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	28.3	22.6	18.4	13.6	10.1	8.32	4.86	3.56	2.82	2.35	2.01	1.59	1.30	0.703
1.80V/cell	29.6	23.3	18.9	13.9	10.3	8.44	4.92	3.61	2.85	2.38	2.04	1.60	1.31	0.710
1.75V/cell	30.9	24.0	19.4	14.1	10.5	8.57	4.98	3.65	2.89	2.40	2.06	1.62	1.33	0.717
1.70V/cell	32.1	24.8	19.9	14.4	10.6	8.69	5.05	3.70	2.92	2.43	2.08	1.64	1.34	0.725
1.65V/cell	32.9	25.2	20.2	14.6	10.7	8.76	5.09	3.73	2.94	2.45	2.10	1.65	1.35	0.729
1.60V/cell	34.6	26.2	20.8	14.9	11.0	8.93	5.17	3.79	2.99	2.49	2.13	1.68	1.37	0.740


DISCHARGE CHARACTERISTICS

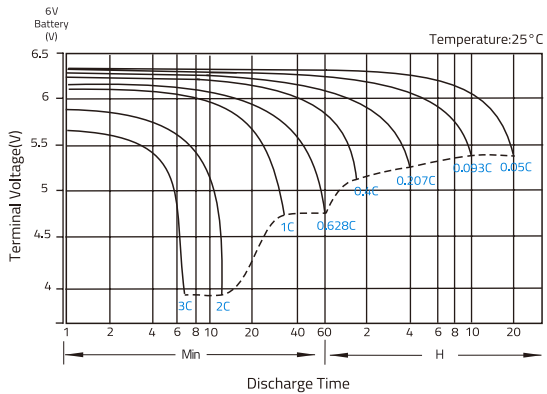

FLOAT CHARGING CHARACTERISTICS

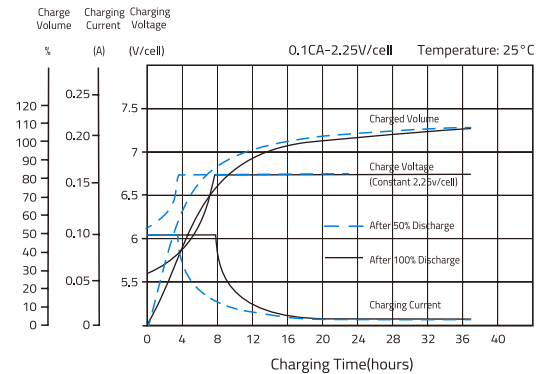

TEMPERATURE IN RELATION TO BATTERY CAPACITY

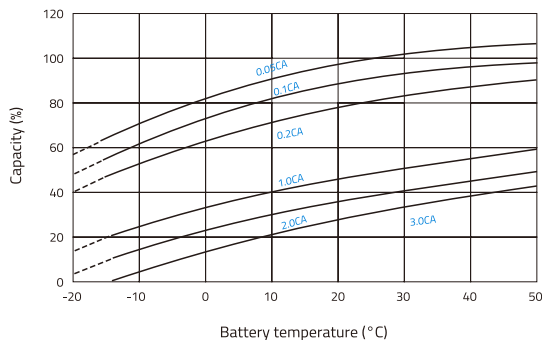

TEMPERATURE ON LONG TERM FLOAT LIFE

